

Fundamentals of Wind Energy

E. Ian Baring-Gould
Senior Engineer
National Wind Technology Center
National Renewable Energy Laboratory
ian_baring_gould@nrel.gov



TOPICS

Introduction

Energy and Power

Wind Characteristics

Wind Power Potential

Basic Wind Turbine Theory


Types of Wind Turbines

Basic Wind Turbine Calculations

Further Information

1400-1800 years ago,
in the Middle East

What is Wind Power

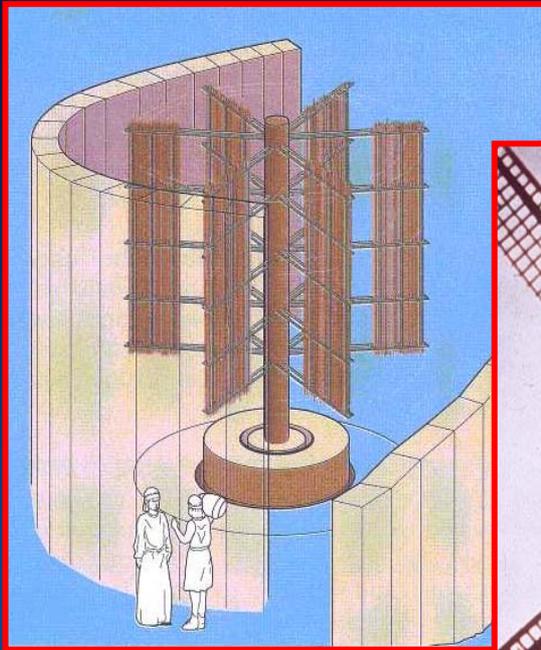

800-900 years ago,
in Europe



140 years ago,
water-pumping
wind mills



70 years ago,
electric power



The ability to
harness the power
available in the
wind and put it to
useful work.

ENERGY AND POWER

ENERGY: The Ability to do work

$$\text{ENERGY} = \text{FORCE} * \text{DISTANCE}$$


Electrical energy is reported in kWh and may be used to describe a potential, such as in stored energy

POWER: Force without time

$$\text{POWER} = \text{ENERGY} / \text{TIME}$$

Generator Size or an instantaneous load which is measured in kW

Power in the Wind

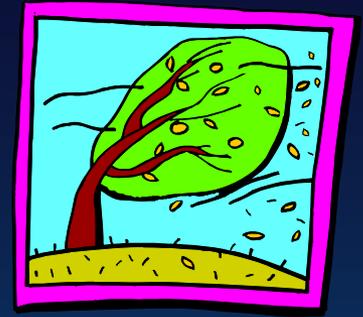

$$P = 0.5 \rho v^3$$

P: power, Watt

ρ : density of air, kg/m³

V: wind speed, m/s

We call this the **Wind Power Density** (W/m²)

If we include the area through which the wind flows (m²), we get the collectable power in Watts.

Power from the Wind


$$P = 0.5 \rho C_p v^3 A_s$$

C_p = Coefficient of Performance
(an efficiency term)

A_s = The swept area of the wind
turbine blades


Multiplied by time give you

Energy...

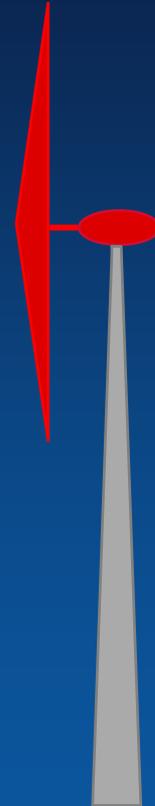

Critical Aspects of Wind Energy

$$P = 0.5 \rho C_p v^3 A_s$$

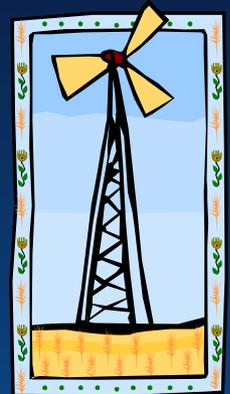


V^3 : Doubling of the wind speed results in an 8 fold increase in power

ρ : High density air results in more power (altitude and temperature)


A_s : A slight increase in blade length, increases the area greatly


C_p : Different types of wind turbines have different maximum theoretical efficiencies (Betz limit ≈ 0.593) but usually between .4 and .5

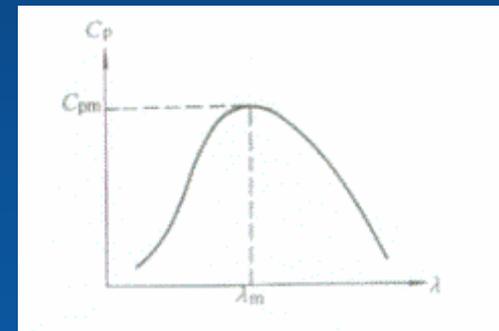

Impact on Increasing Wind Speed


A small increase in wind speed can increase the power greatly

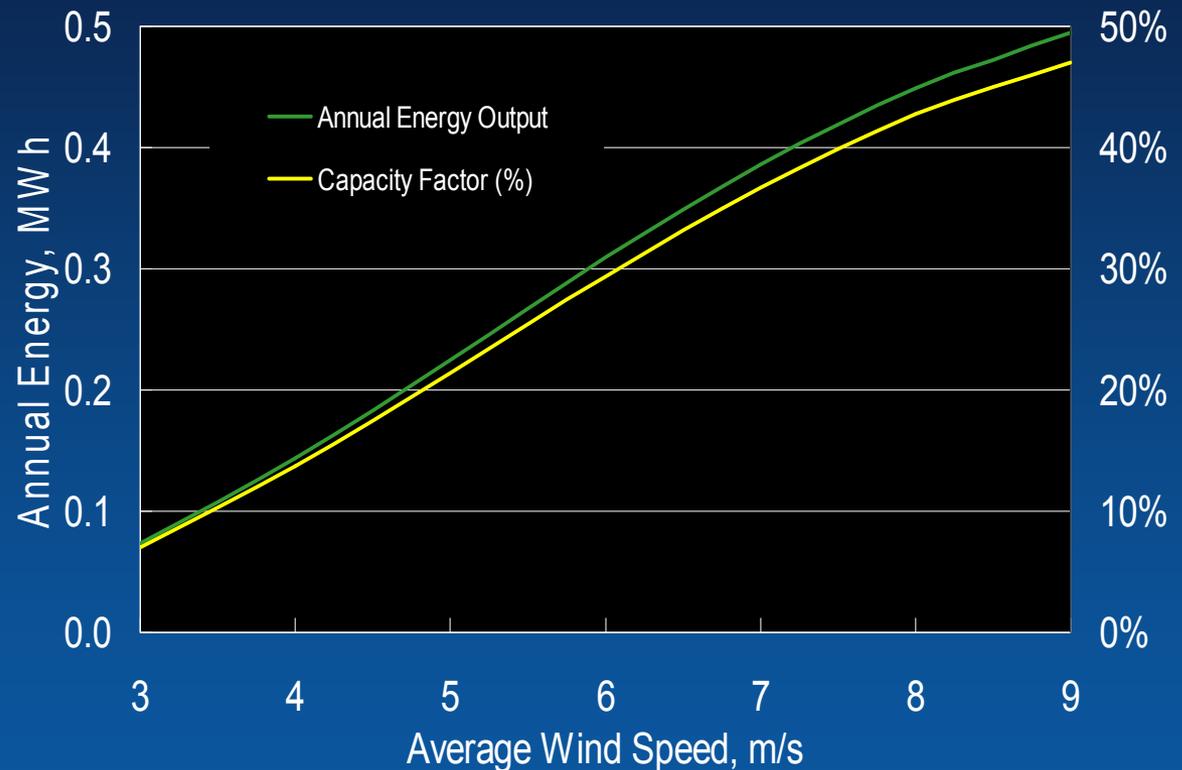


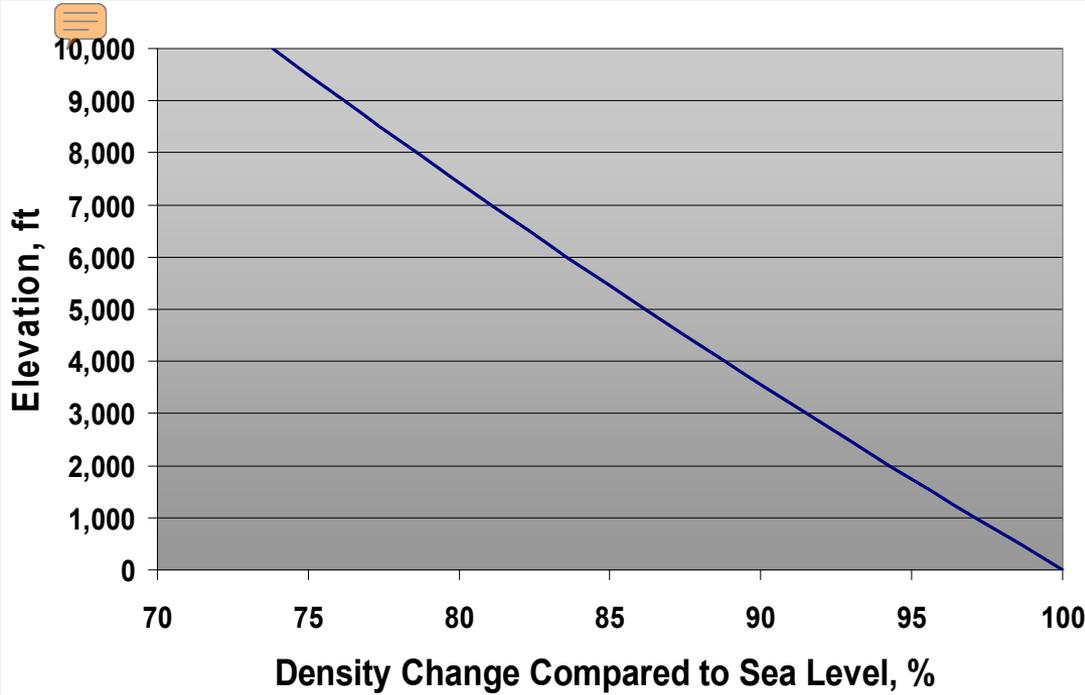

**Air Density
Changes with
Elevation**

**Air Density
Changes with
Temperature**

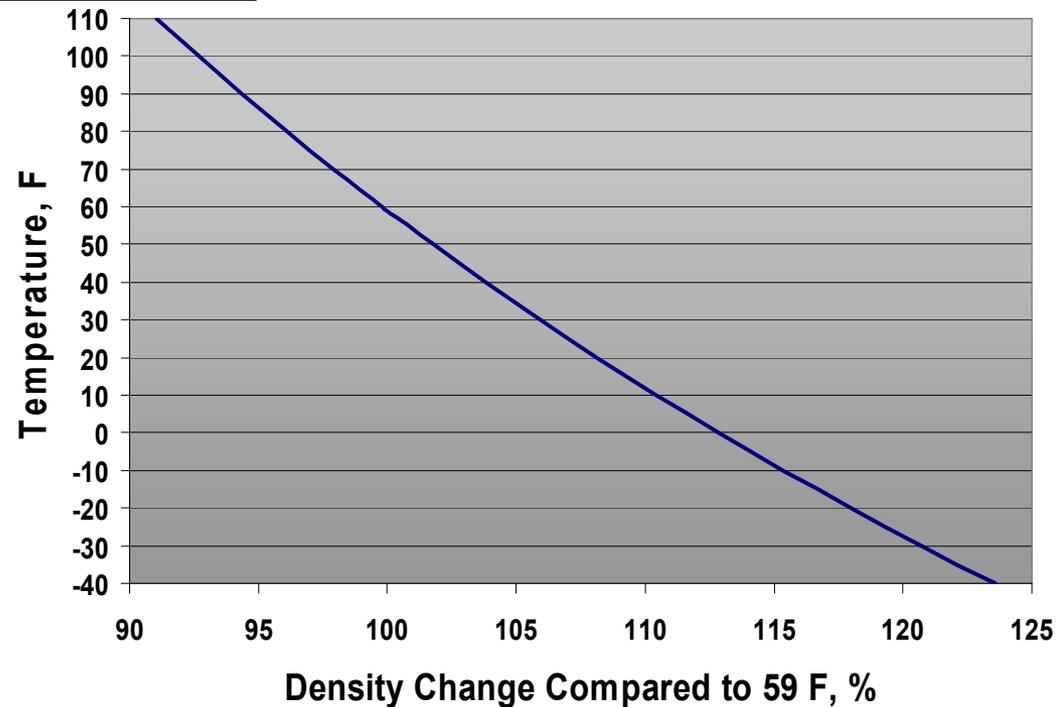

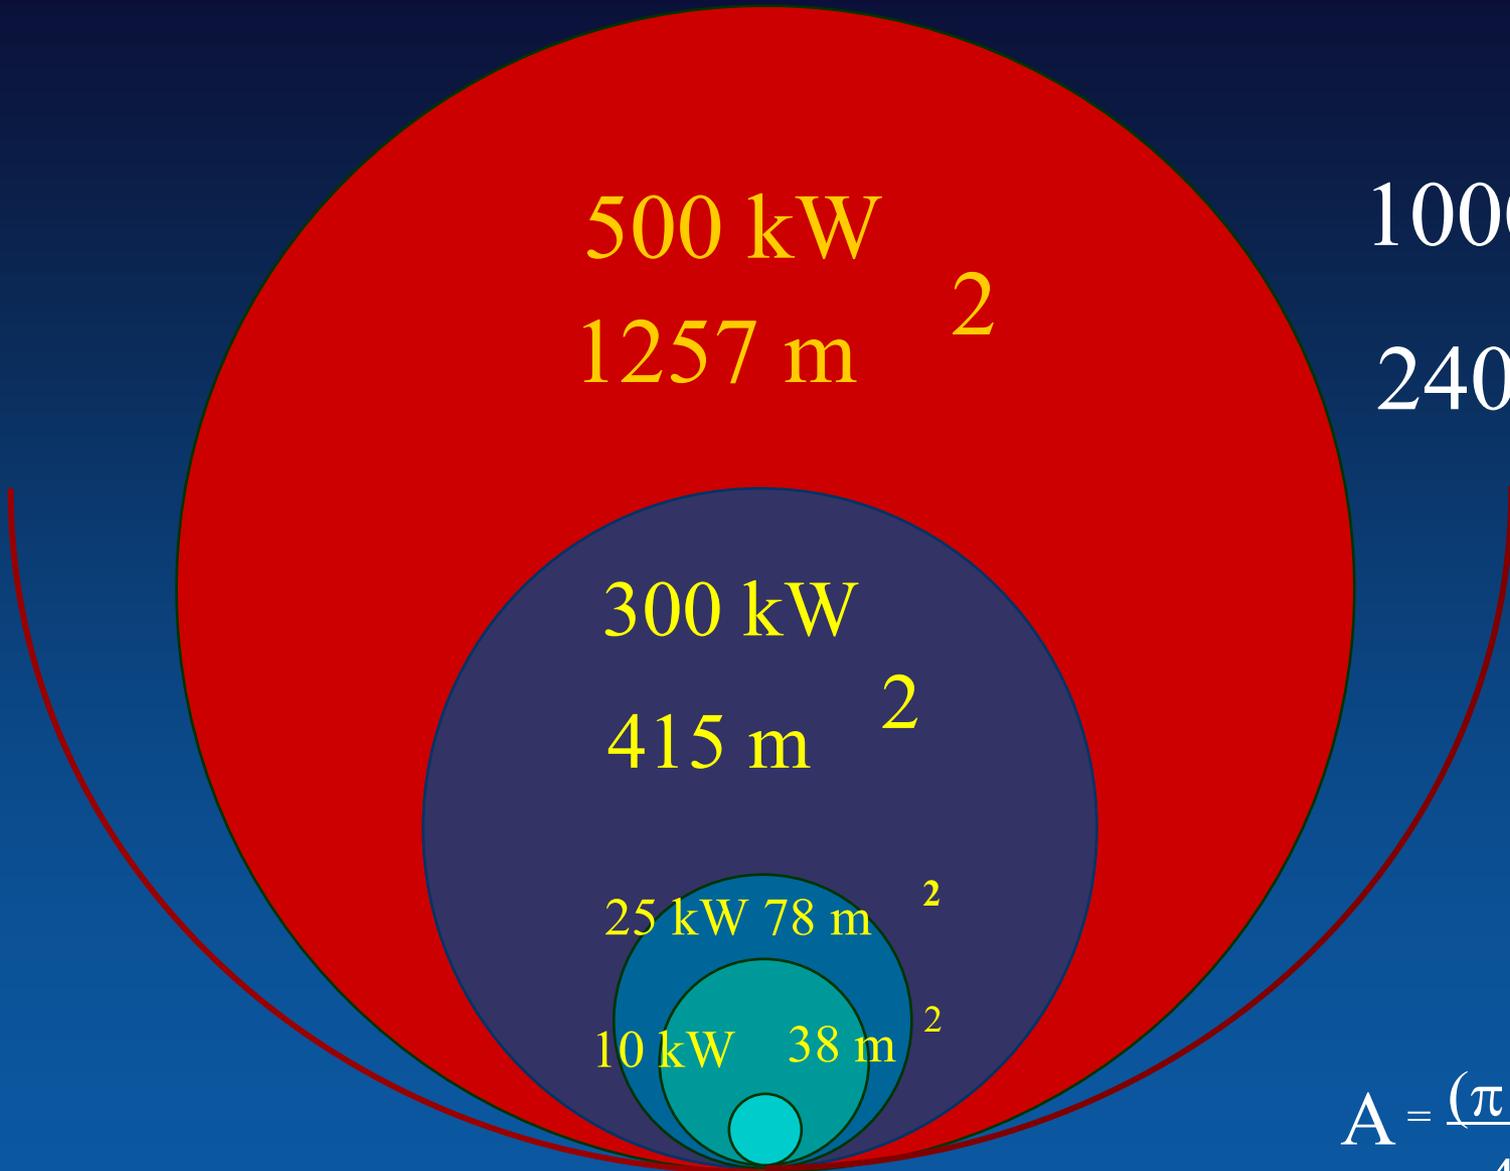

1000 kW
2400 m²

$$A = \frac{(\pi D^2)}{4}$$

500 kW
1257 m²

300 kW
415 m²

25 kW 78 m²

10 kW 38 m²

1 kW 6 m²




Wind Characteristics and Resources


Understanding the wind resource at your location is critical to understanding the potential for using wind energy

- Wind Speed
 - Wind Profile
 - Wind classes
 - Collection and reporting
- Wind Direction
- Wind speed change with height

Wind Speed

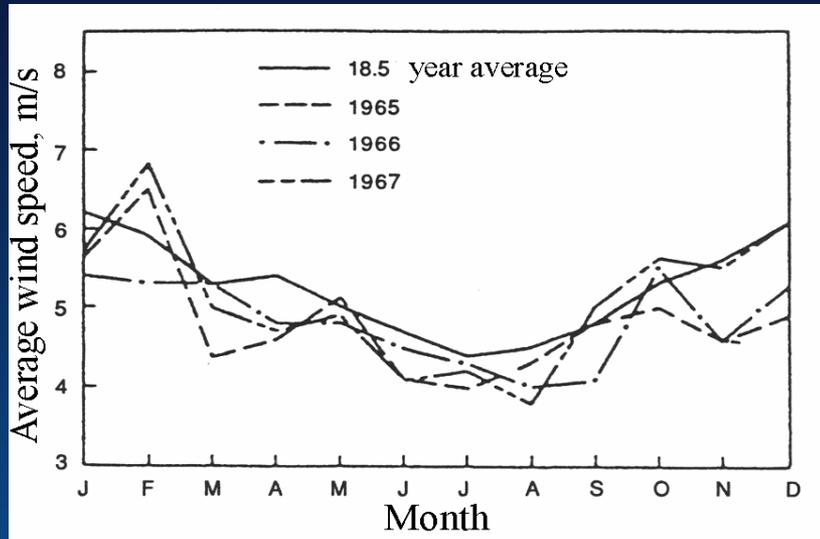

- Measured in m/s or mph
- Varies by the second, hourly, daily, seasonally and year to year
- Usually has patterns
 - Diurnal - it always blows in the morning
 - Seasonal – The winter winds are stronger
 - Characteristics – Winds from the sea are always stronger and are storm driven.

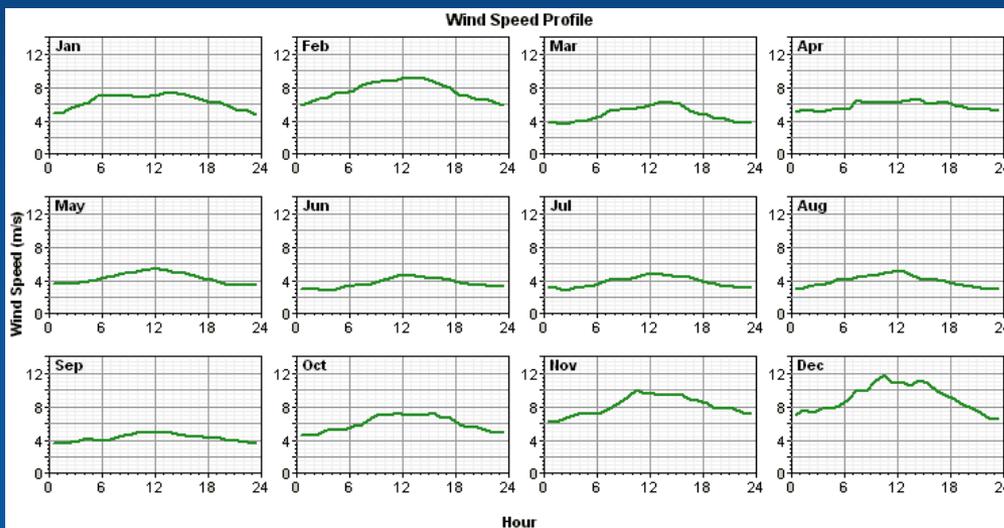

So, which is better...


1. A location where the wind that blows only 50% of the time at 10 m/s but is calm the rest of the time
2. A location where the wind that blows all of the time at 5 m/s

$$P = 0.5 \rho C_p v^3 A_s$$

Both have exactly the same annual average wind speed...

Wind Maps and Class

Careful:
Wind class is defined
at a specific height

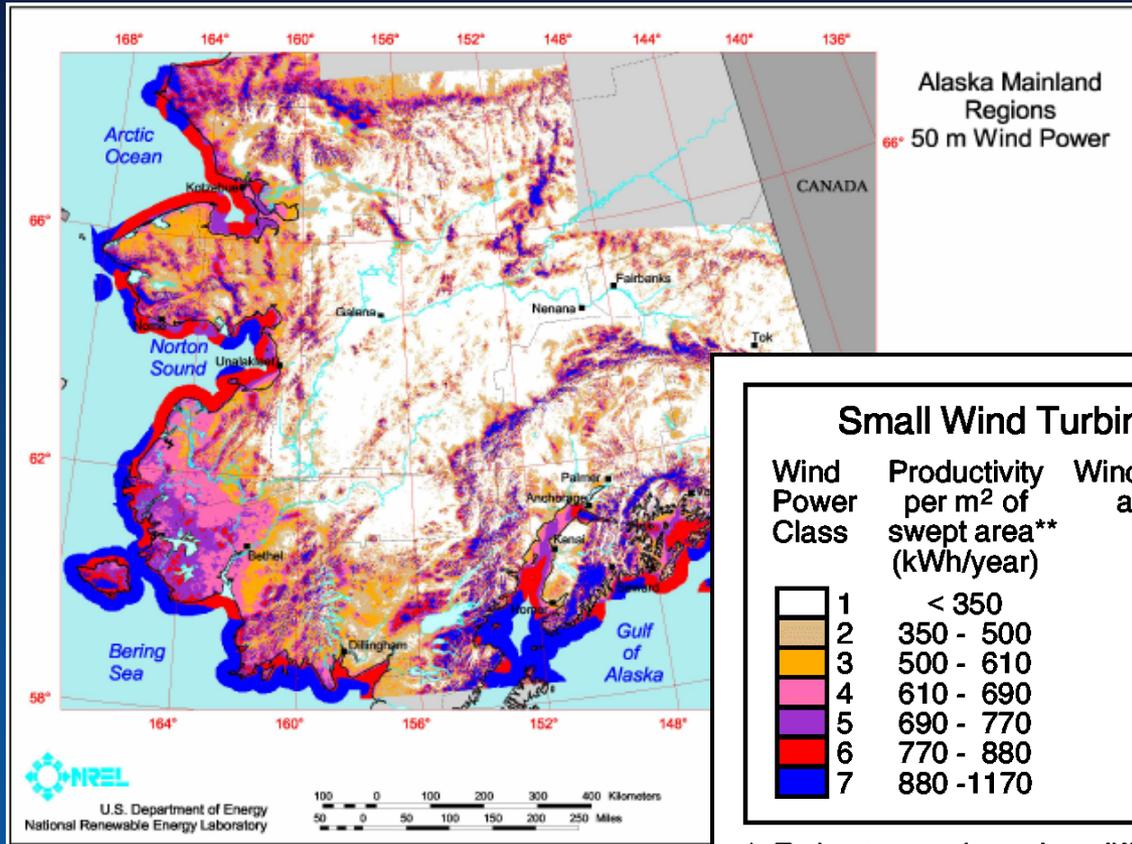


Small Wind Turbine Productivity Estimates*

Wind Power Class	Productivity per m ² of swept area** (kWh/year)	Wind Power Density at 33 ft (10 m) (W/m ²)	Wind Speed at 33 ft (10 m)	
			(mph)	(m/s)
1	< 350	<100	< 9.8	< 4.4
2	350 - 500	100 - 150	9.8 - 11.5	4.4 - 5.1
3	500 - 610	150 - 200	11.5 - 12.5	5.1 - 5.6
4	610 - 690	200 - 250	12.5 - 13.4	5.6 - 6.0
5	690 - 770	250 - 300	13.4 - 14.3	6.0 - 6.4
6	770 - 880	300 - 400	14.3 - 15.7	6.4 - 7.0
7	880 -1170	400 -1000	15.7 - 21.1	7.0 - 9.4

* Estimates are based on different models and sizes of wind turbines assuming a tower height of 80 ft (24 m).

** For systems of different sizes, multiply the estimated productivity by the total swept area of the turbine.

Wind Speed Data Collection and Reporting

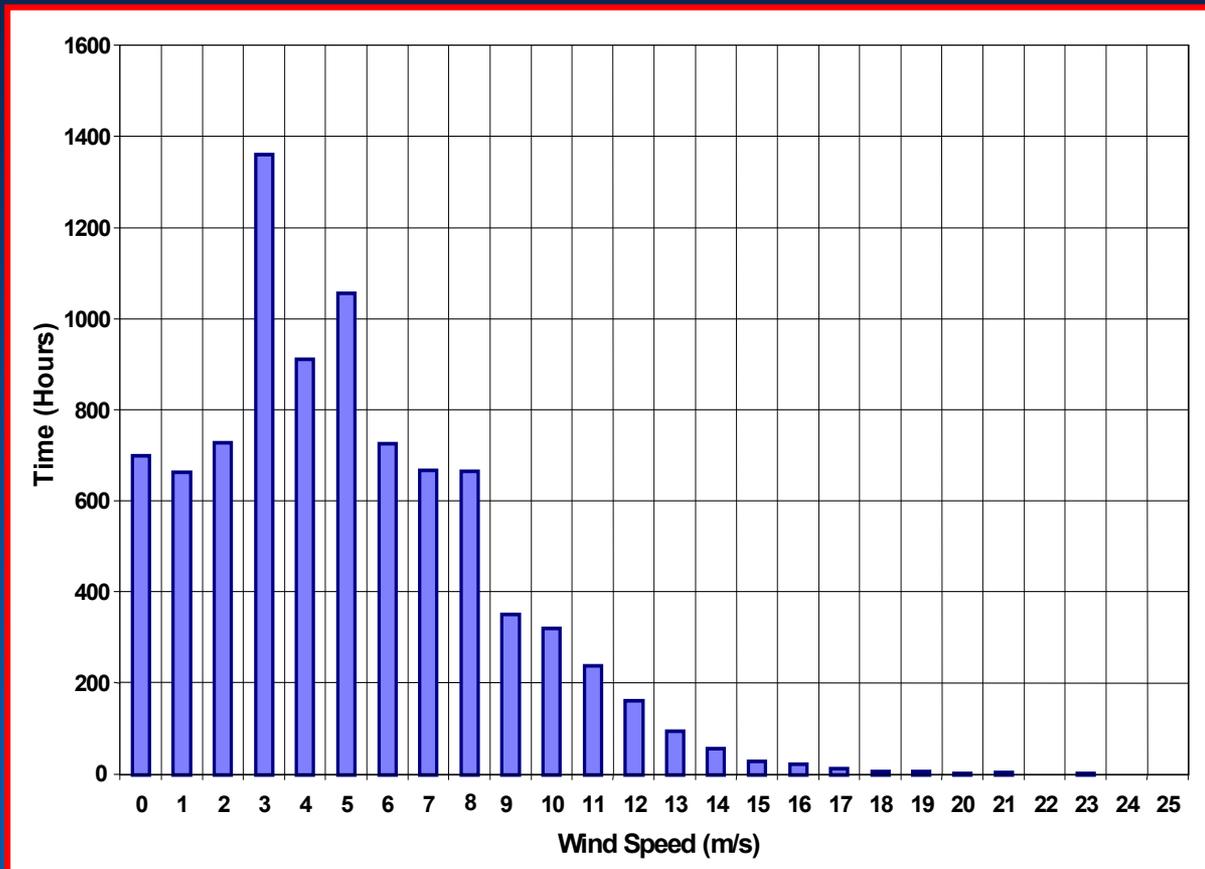

Collection

- Measured every 1 or 2 seconds
- Averaged every 10 or 15 minutes
- Reported as hour averages


Turbulence Intensity

Wind Speed

Frequency of Occurrence


Histogram based on hour average data for a year

Wind Direction

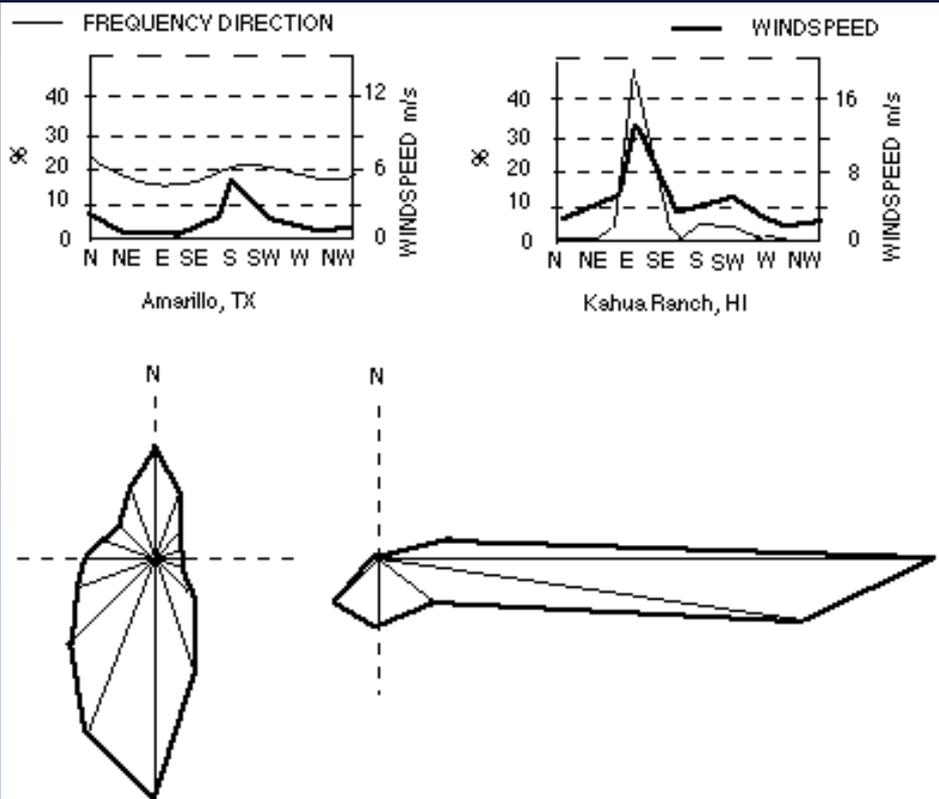

Wind Rose

Wind Speed Rose

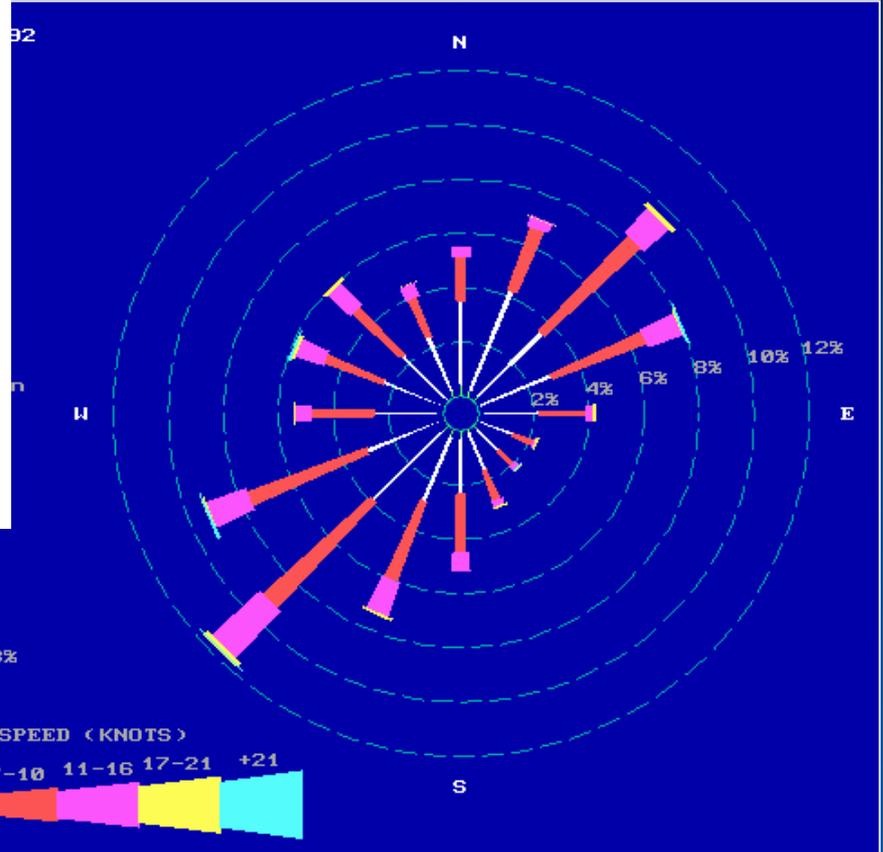


CONTINENTAL TRADE WINDS

Can also have a wind direction change intensity – similar to turbulence


Impacts on Wind Speed

Many things impact the speed and direction of the wind at any specific location, making local measurements important

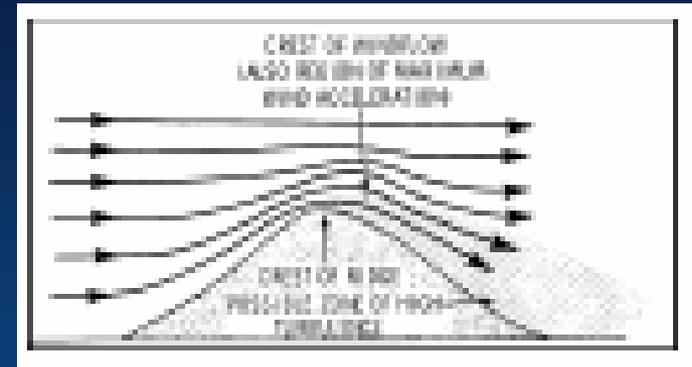


Wind Speed Increases with Height

- Because of friction with the earth, air closer to the surface moves more slowly
- The farther we get away from the earth (increase in altitude) the higher the wind speed gets until it is no longer effected by the earths surface

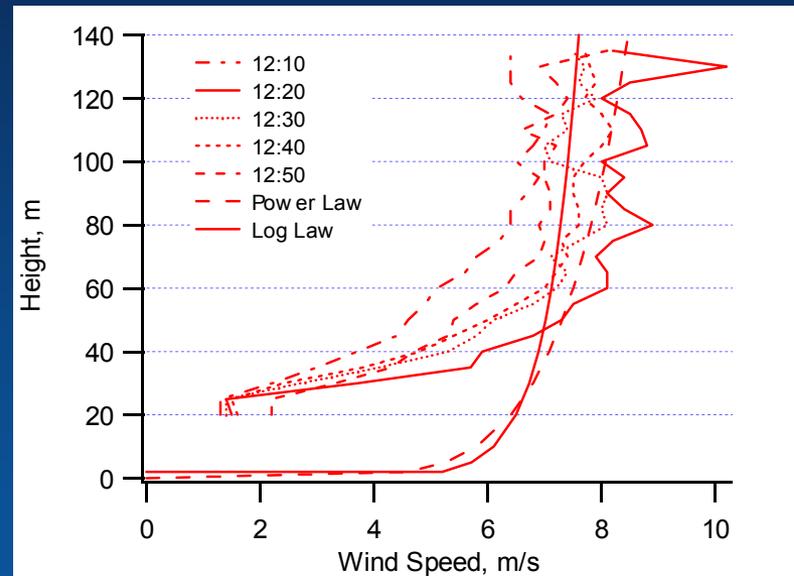

Wind Shear

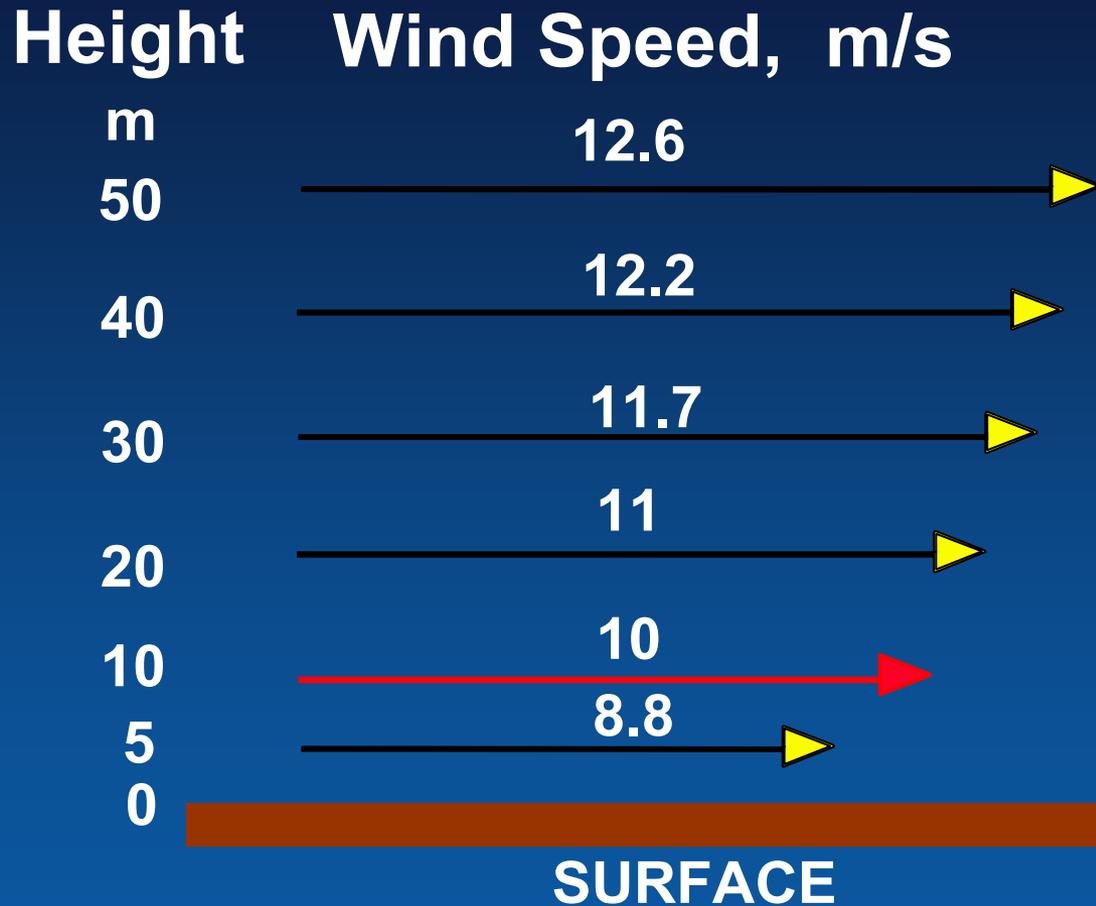

- The type of surface (grass, trees) impacts the wind shear
- Real vs. apparent height

$$V_N = V_O \left[\frac{h_N}{h_O} \right]^N$$

Factoring in Measurement Height

The Power Law


$$V_N = V_O \left[\frac{h_N}{h_O} \right]^N$$

- V_N : Wind speed at new height,
- V_O : Wind speed at original height,
- h_N : New height,
- h_O : Original height,
- N : Power law exponent.


Terrain	Power Law Exponent
Water or ice	0.1
Low grass or steppe	0.14
Rural with obstacles	0.2
Suburb and woodlands	0.25

Source: Paul Gipe, Wind Energy Comes of Age, John Wiley and Sons Inc, 1995, pp 536.

Height Impacts on Power

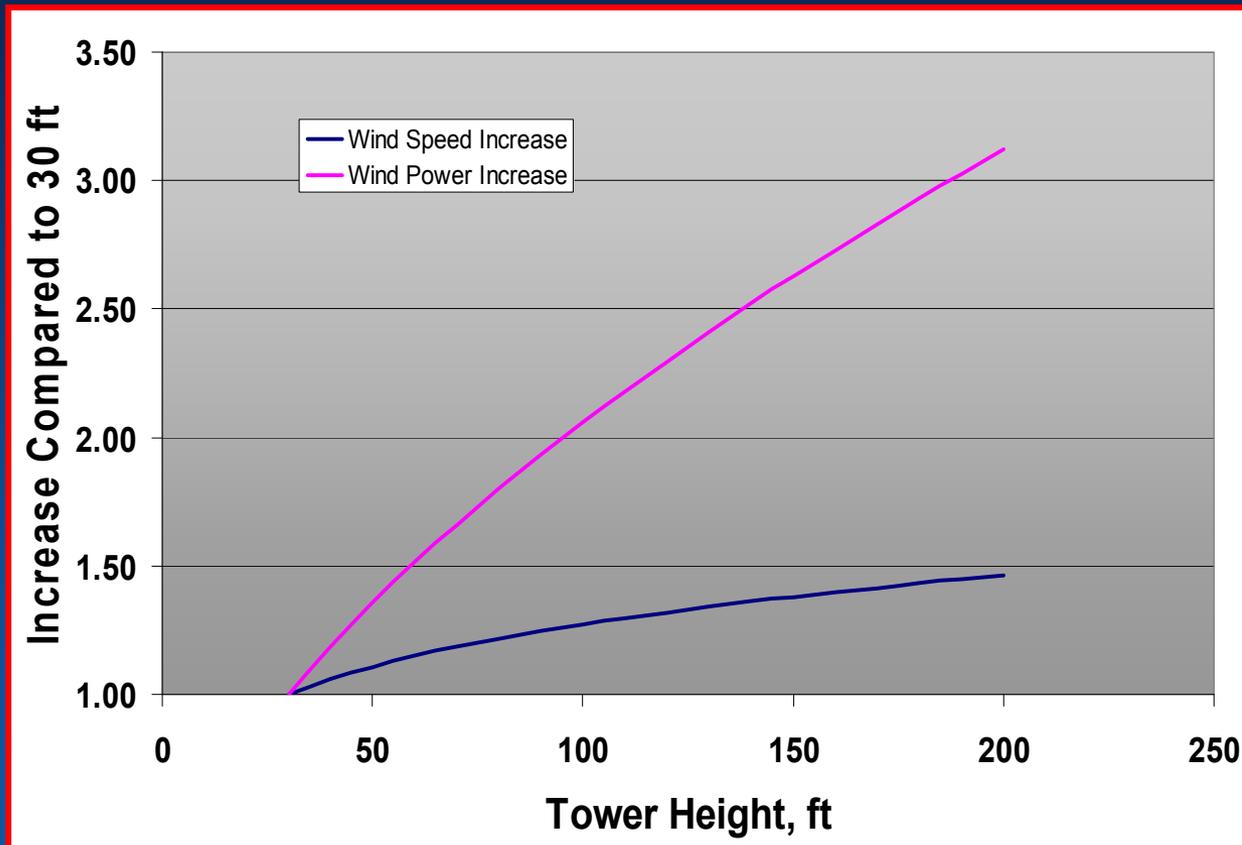

Micro-Siting Example: Obstruction of the Wind by a Small Building

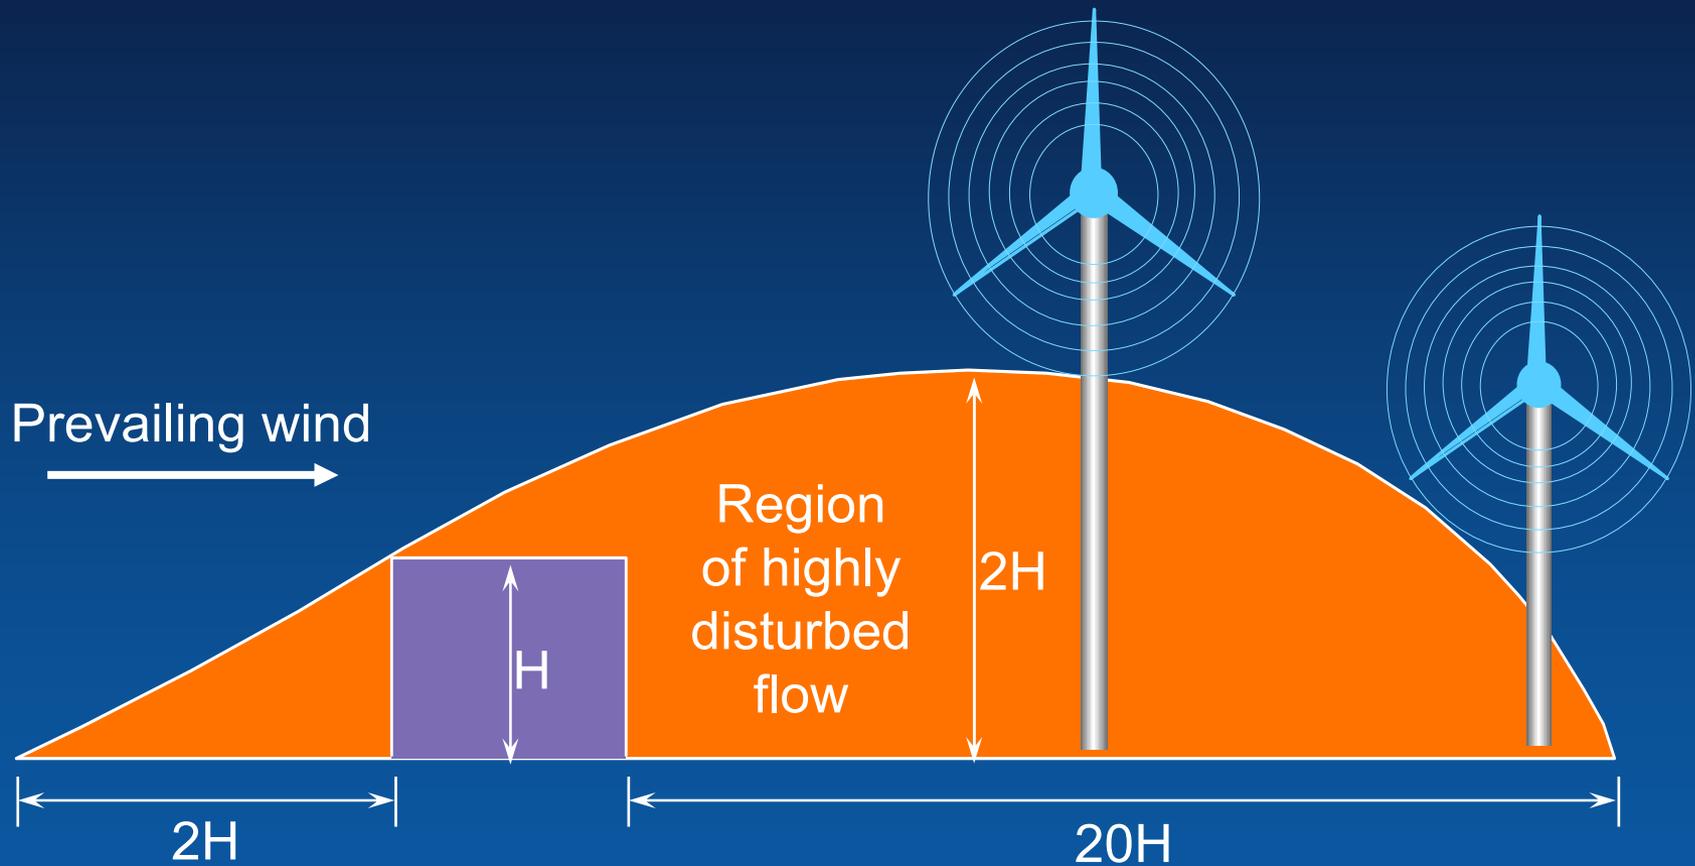

Basic Wind Turbine Theory

Lift and Drag – The different types of wind turbines



Aerodynamics – How turbines work

Power Curves – The performance of wind turbines

Power Availability - Power you can get from the wind

Different types of lift turbines


Aerodynamic Drag

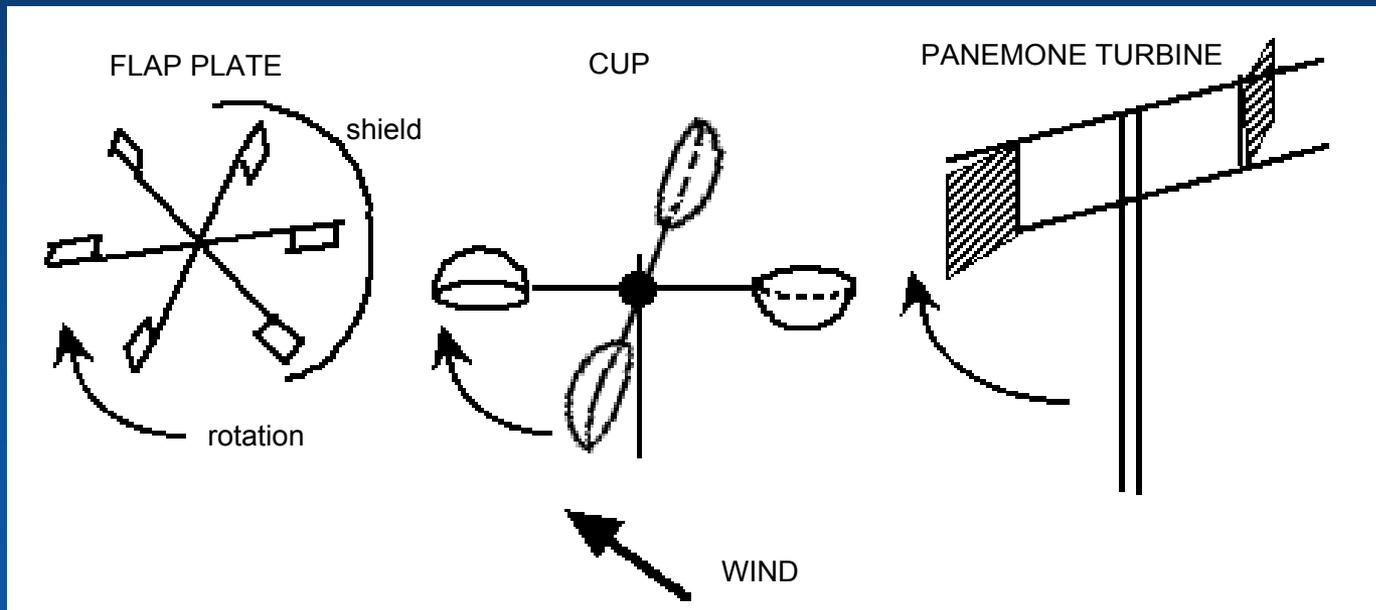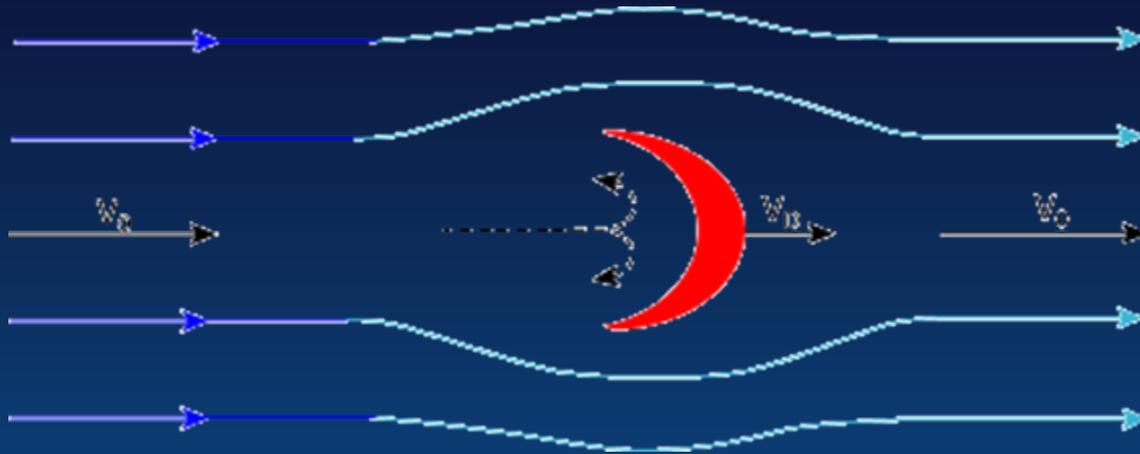


Classic Drag Devices



Some Modified Drag Devices

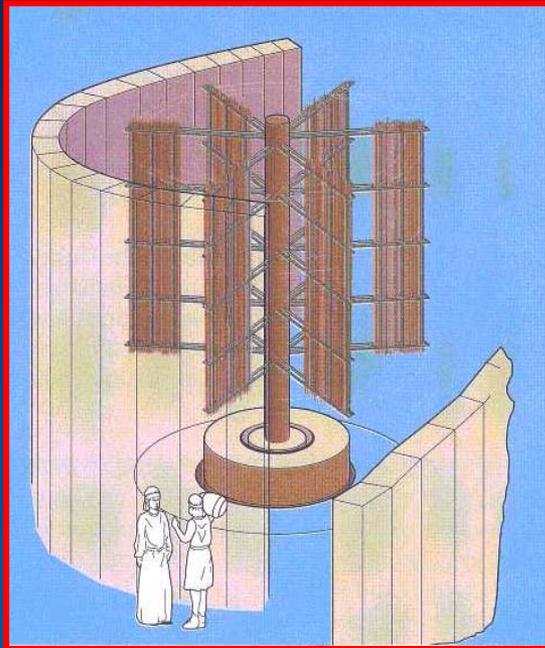


Aerodynamic Lift

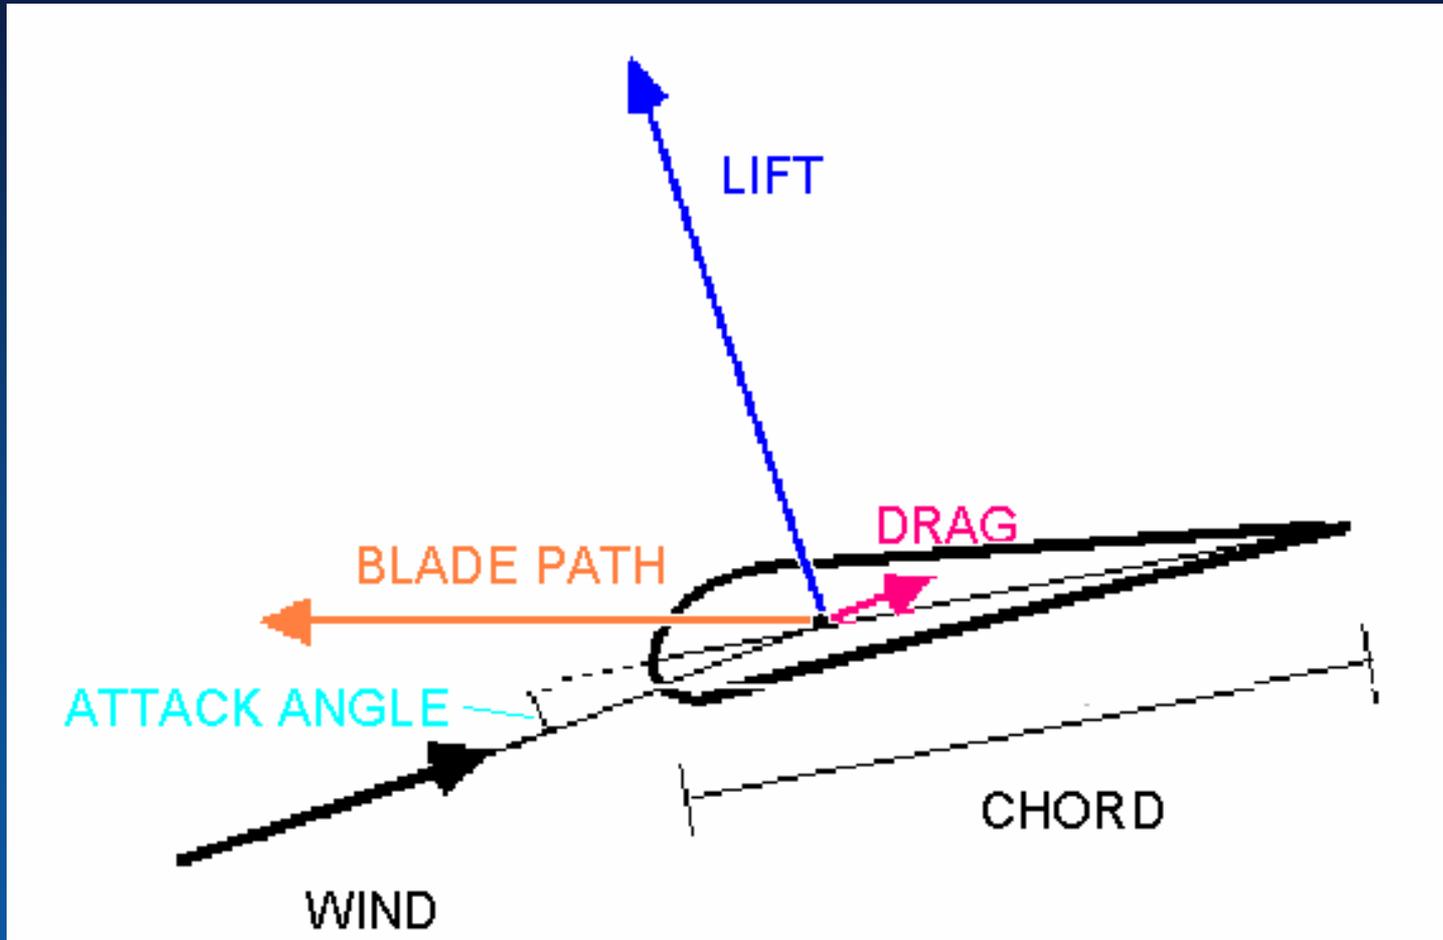

Lift Wind Turbines



WTG Power Curve

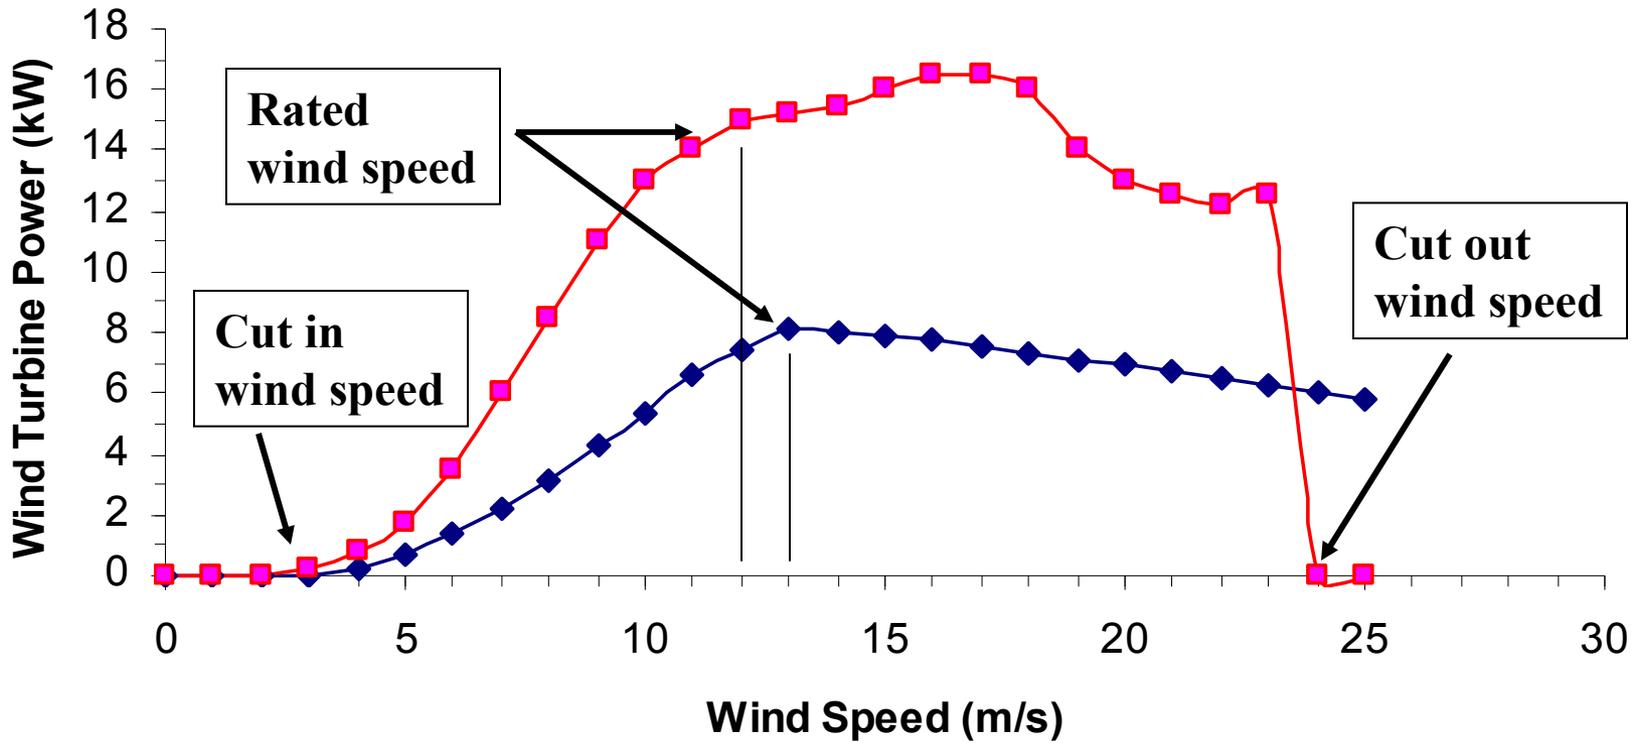


Important Terms

- **Cut in wind speed:** The wind speed that the turbine starts producing power (may be different than the speed at which the turbine starts spinning)
- **Rated Wind Speed:** The wind speed at which the turbine is producing “rated power” – though “rated power” is defined by the manufacture
- **Cut out wind speed:** The wind speed at which the turbine stops producing power
- **Shut down wind speed:** The wind speed at which the turbine stops to prevent damage
- **Survival wind speed:** Wind speed that the turbine is designed to withstand without falling over


Wind Turbine Power Curve

Bergey 1500 (manufacturer's data)

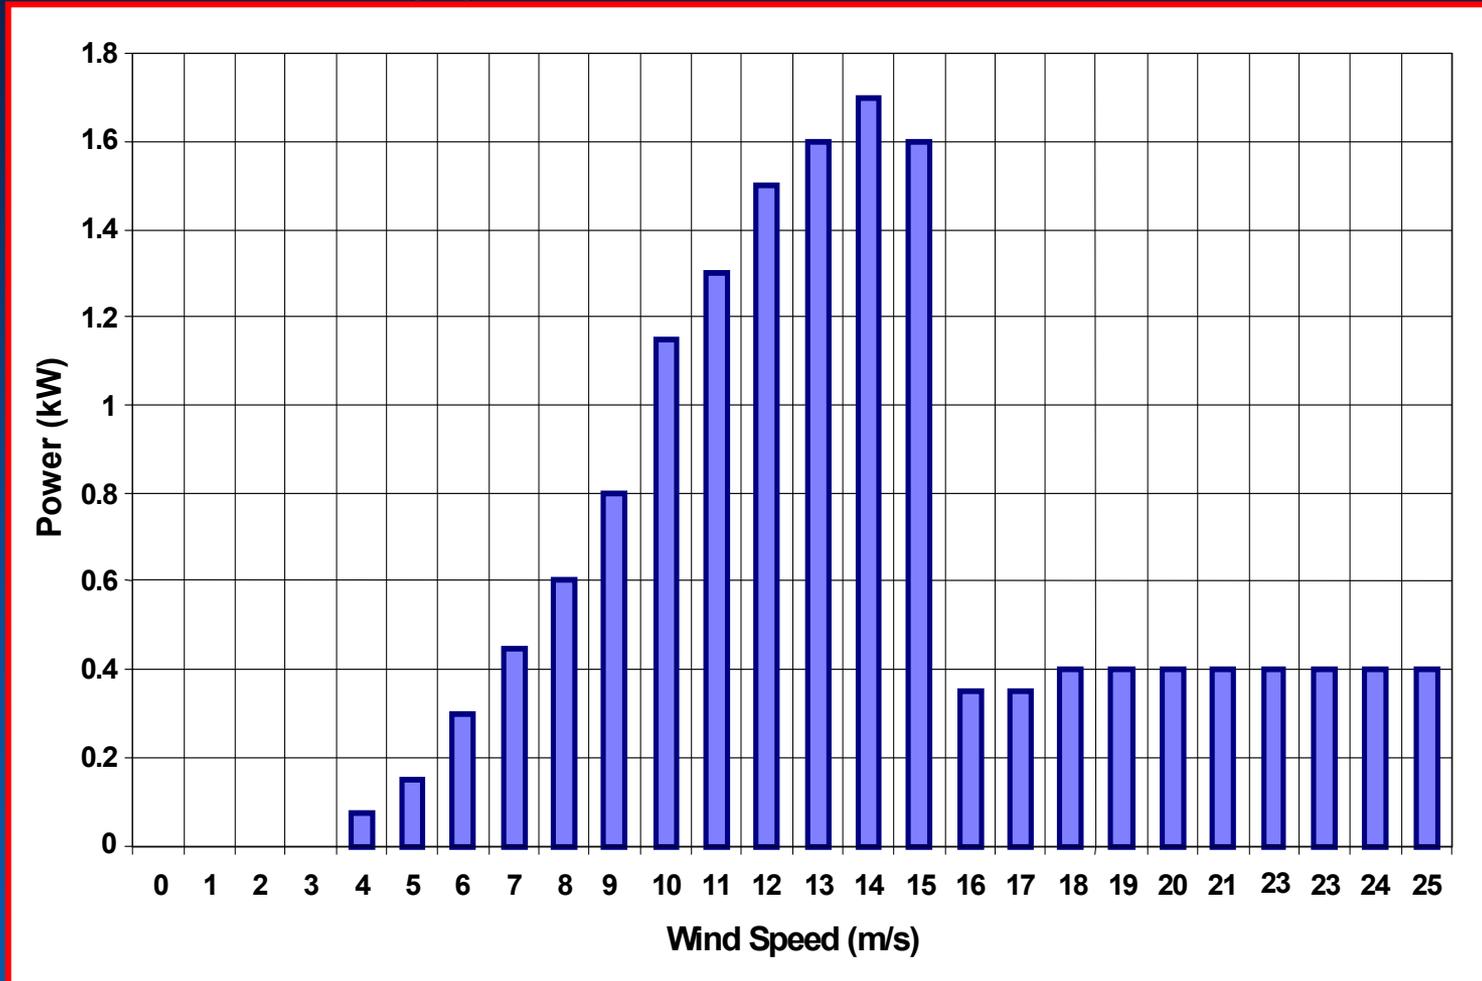


Wind Speed Frequency of Occurrence

Average Wind Speed: 5 m/s (11 mph)

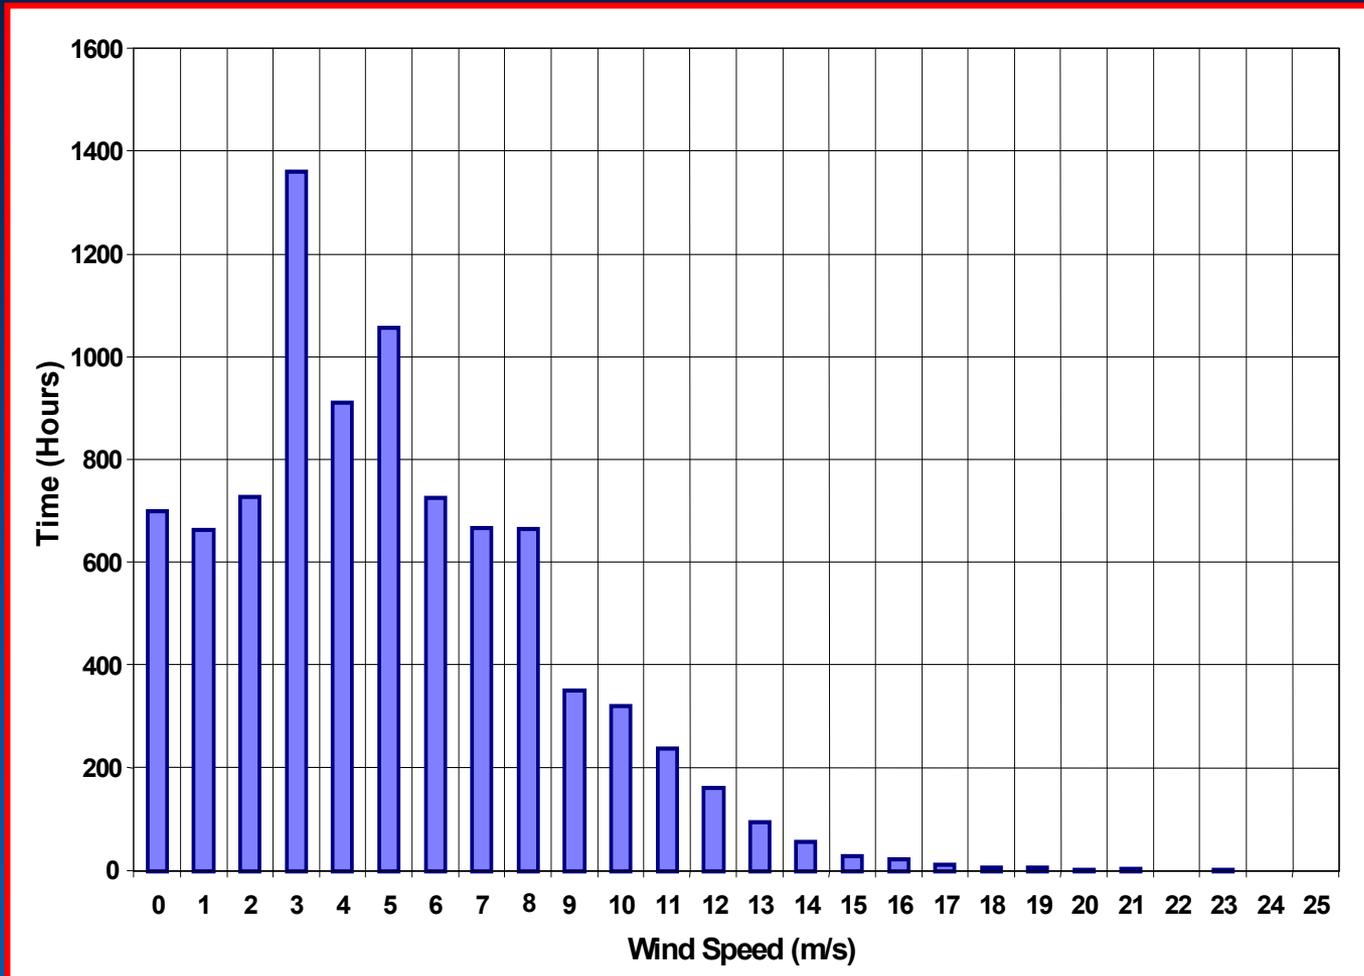

Annual Energy Production: 2643 kWh/year Bergey 1500 @ 5 m/s (11 mph) average wind speed

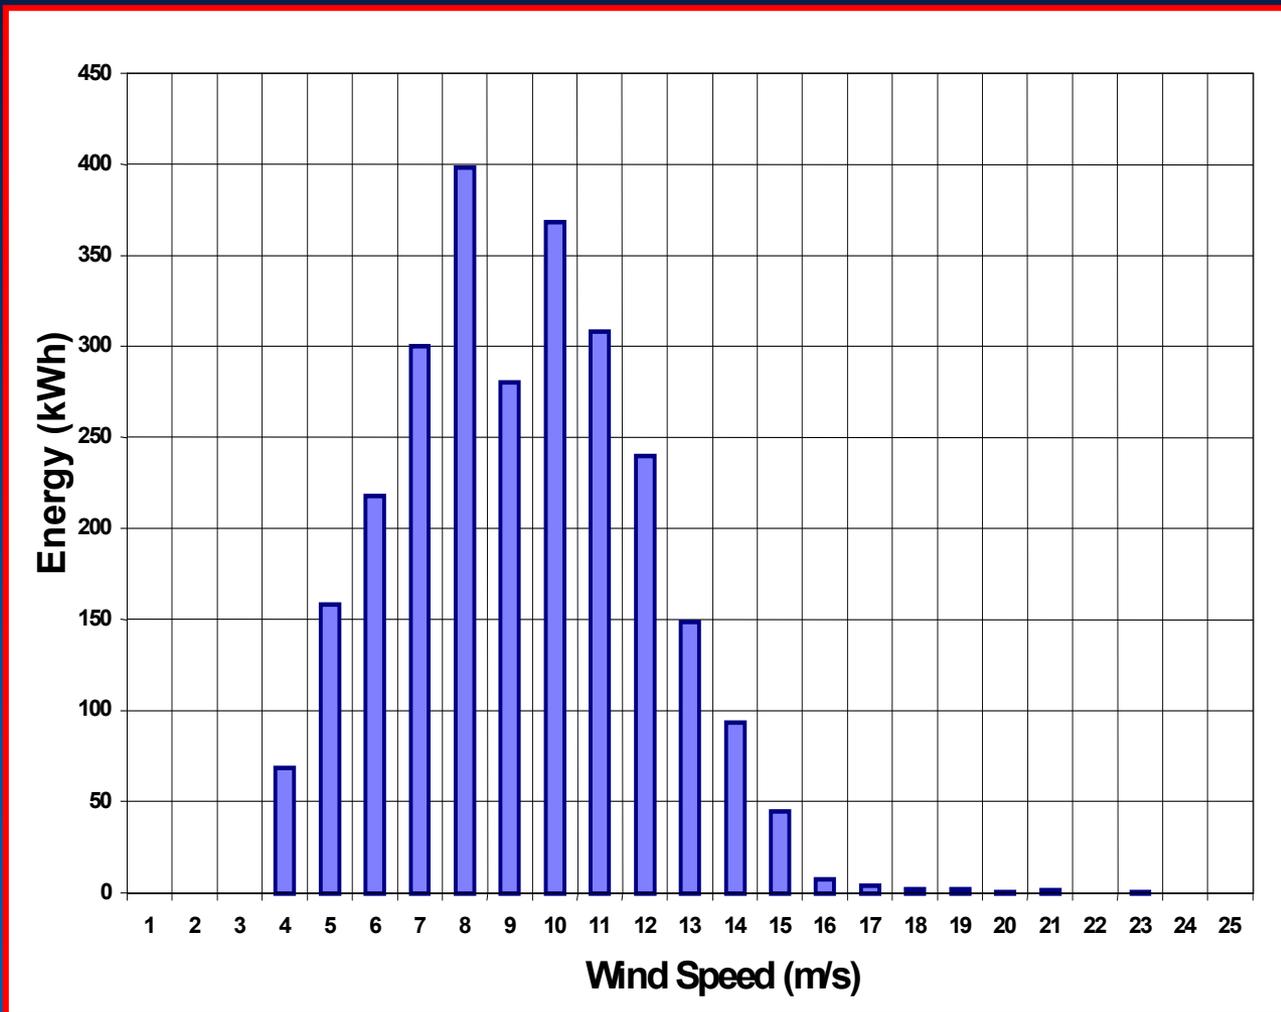

All available energy may not be captured

Types of Lift Turbines


HAWT

VAWT




Basic Properties of HAWT


- Basics of a horizontal axis wind turbine
- Types of turbines
- Small distributed turbines
- Large grid connected turbines

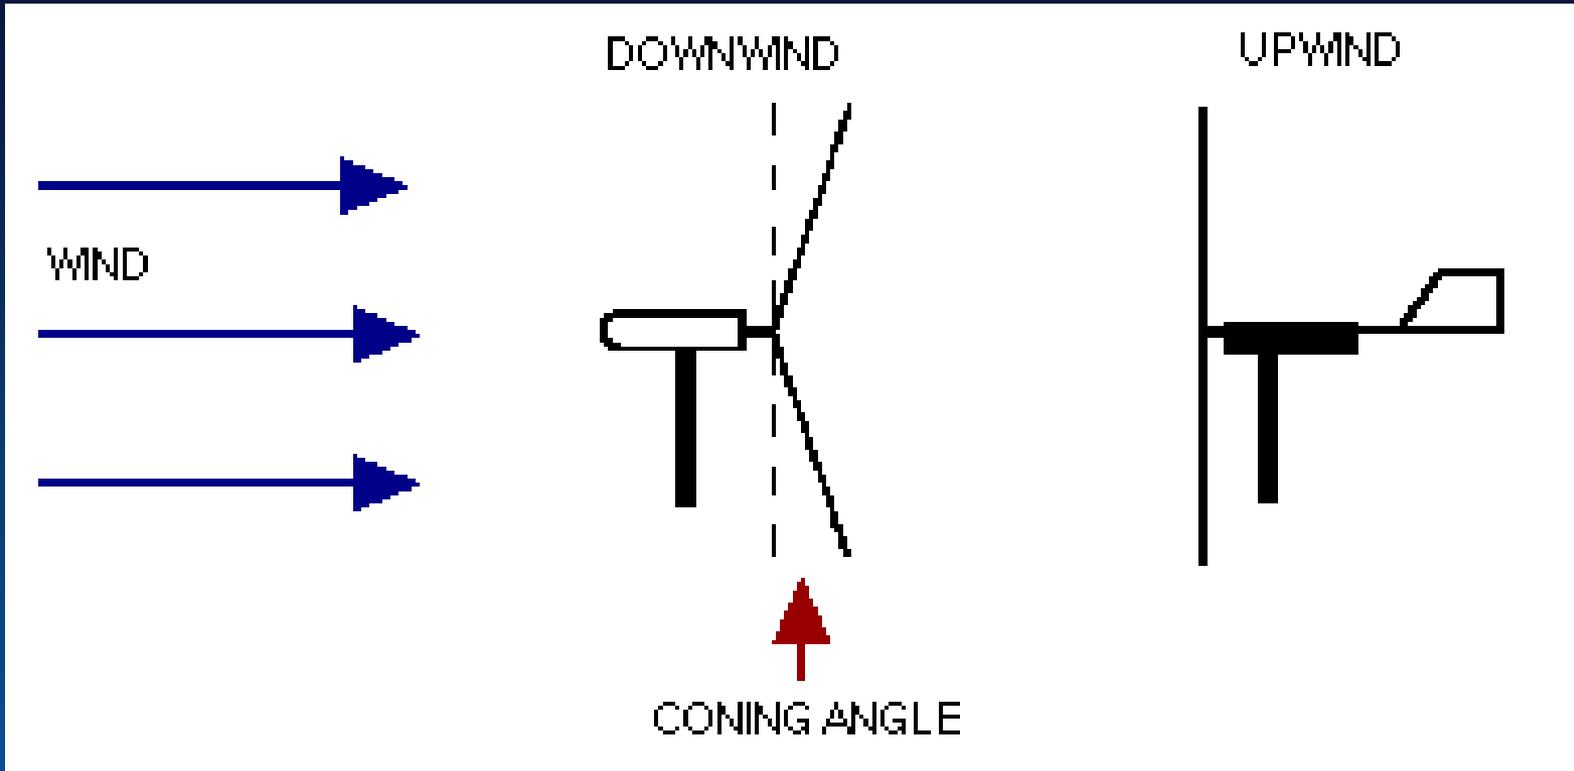

Parts of a Wind Turbine

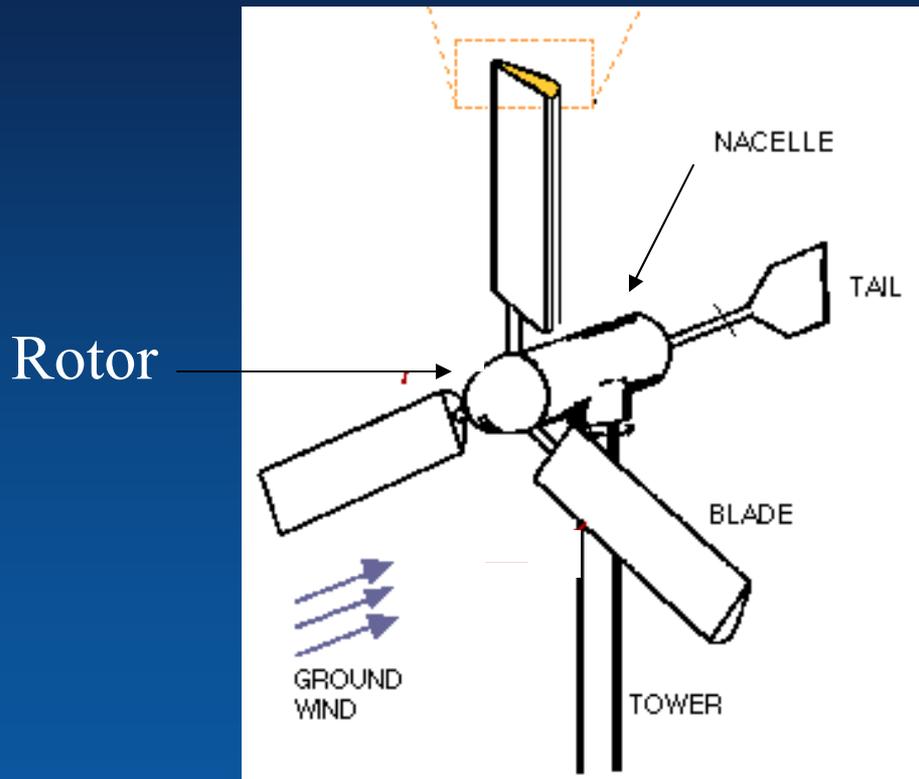


Basic Motion of a Wind Turbine

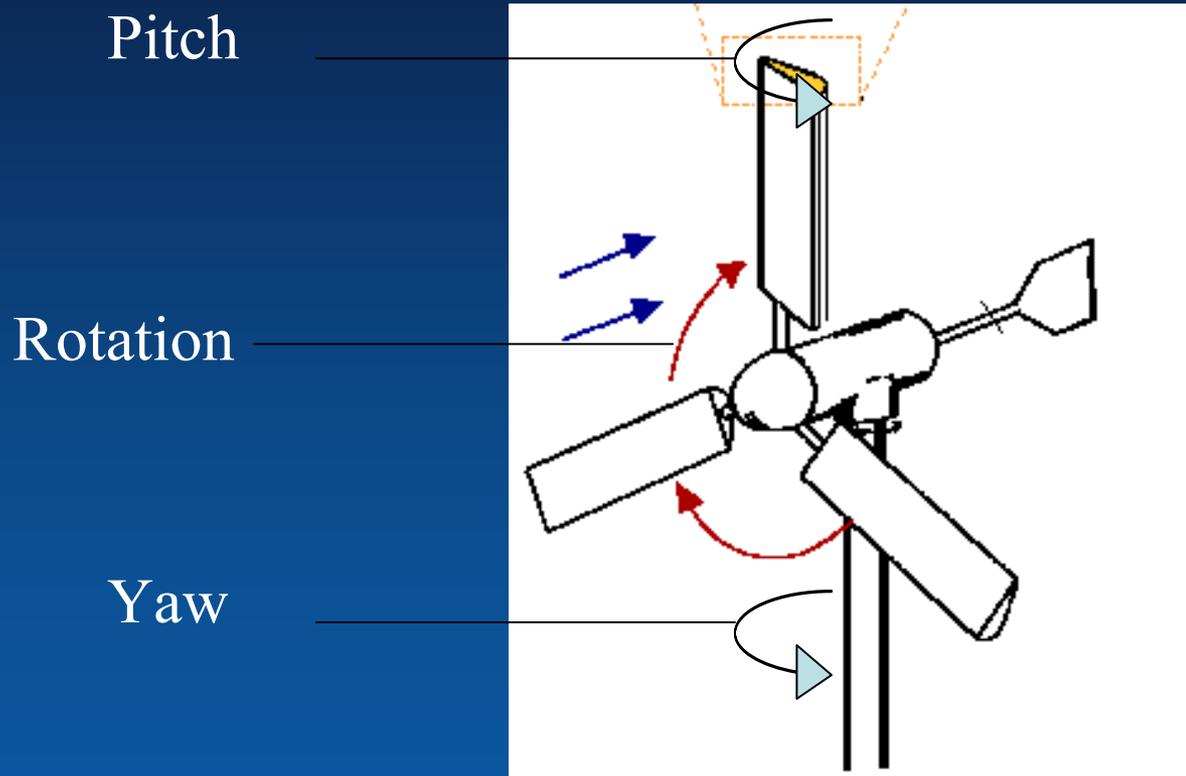

Different Types of Wind Turbines

- Utility-Scale Wind Power
600 - 5,000 kW wind turbines
 - Installed on wind farms, 10 – 300 MW
 - Professional maintenance crews
 - Classes 5 and 6 (> 6 m/s average)
- Distributed Wind Power
300 W - 600 kW wind turbines
 - Installed at individual homes, farms, businesses, schools, etc.
 - On the “customer side” of the meter
 - High reliability, low maintenance
 - Classes 2 and 3 (5 m/s average)

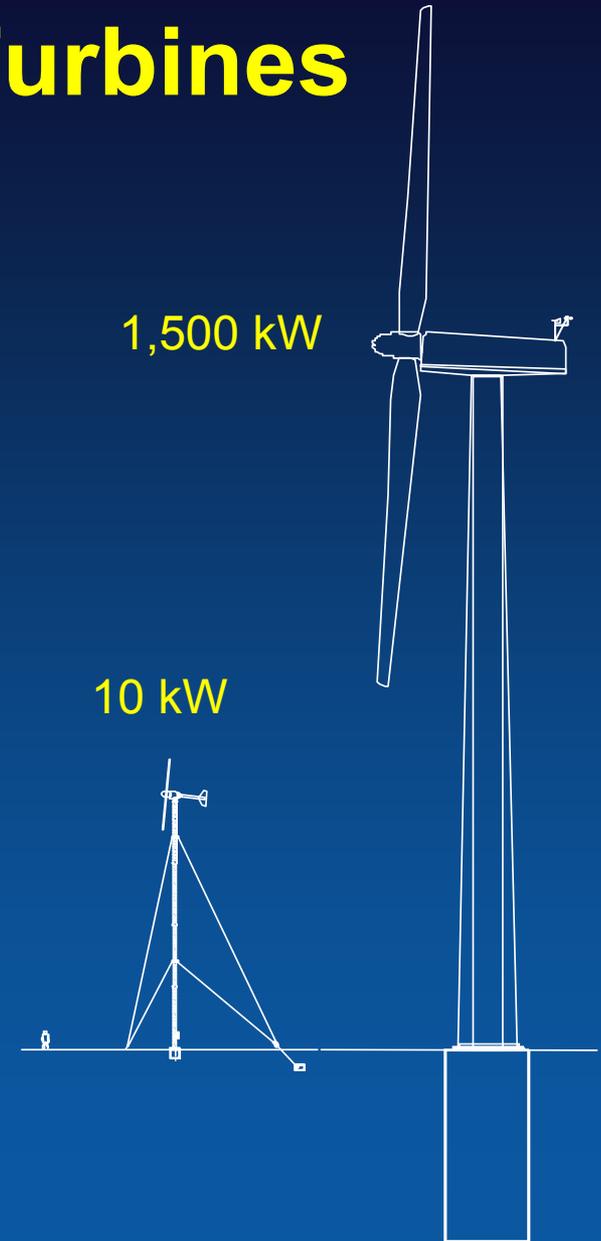

Sizes and Applications



Small (≤ 10 kW)

Homes

Farms

Remote Applications
(e.g. water
pumping, telecom
sites, icemaking)



Intermediate

(10-250 kW)

Village Power

Hybrid

Systems

Distributed


Power



**Large (250 kW – 2+
MW)**

**Central Station Wind
Farms**


Distributed Power

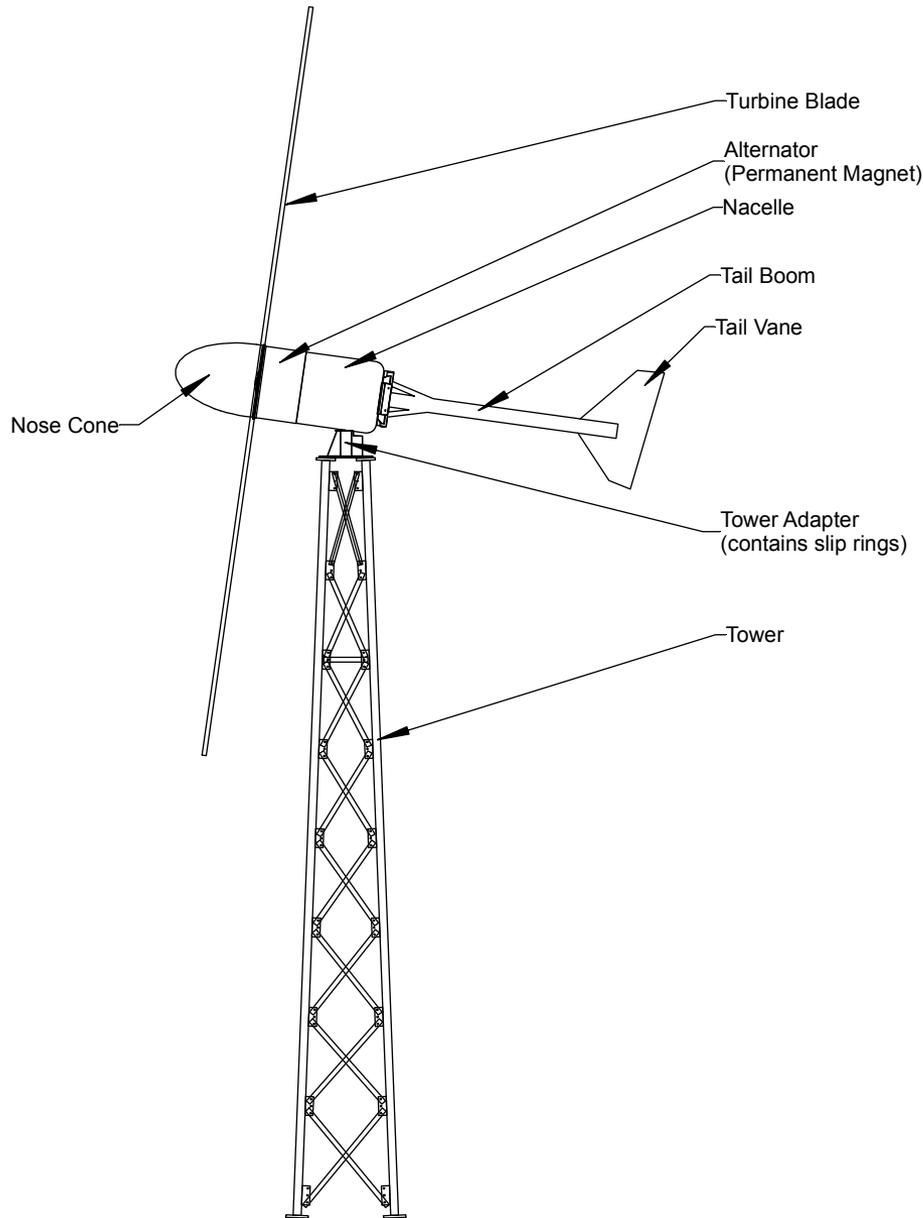

Permanent Magnet WTG

- Permanent magnet alternator
- Generates wild AC (variable voltage and frequency) power that must be treated.
- Can provide AC or DC power
- Passively controlled

Overspeed Protection of Small WTG During High Winds

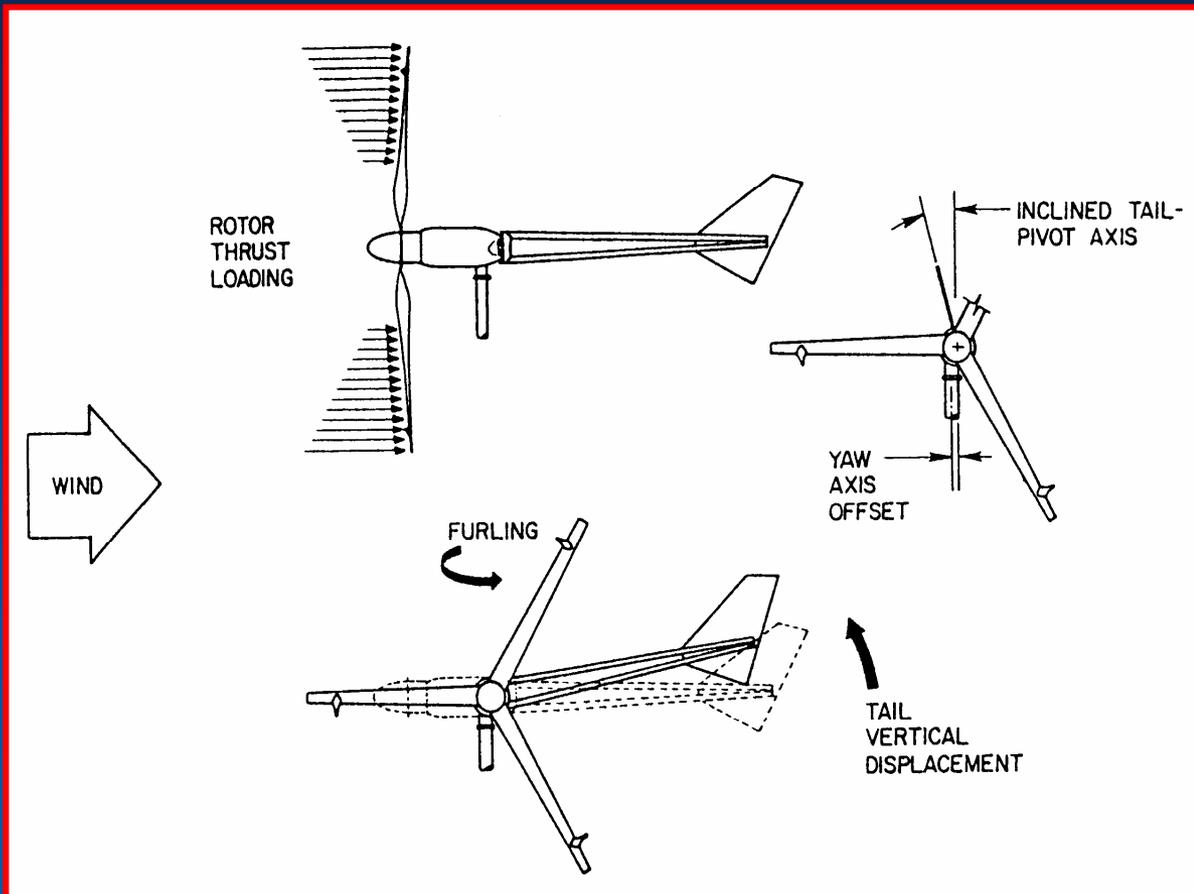


Furling: The rotor turns up or too one side under high winds

- Used to control rotor speed and power output
- Dynamic activity

Small Wind Turbine Towers

- Guyed lattice and tube towers are the least expensive and most commonly used towers for small wind turbines
- Adequate space is needed for the guy wires and their anchors
- Free-standing towers are used where space is limited

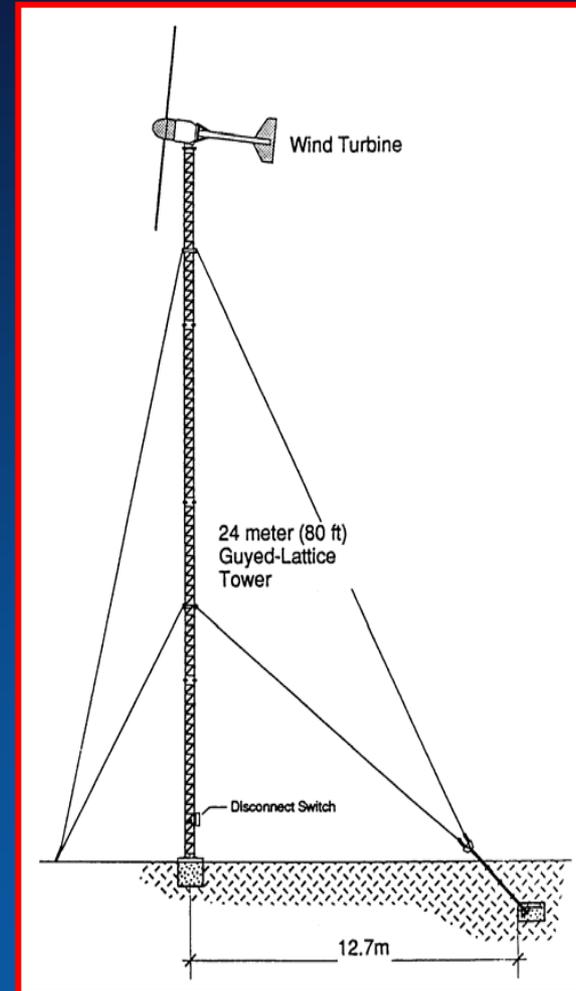


Tilt-Up Towers

Turbine installation in remote areas can be a problem.

To solve this problem:

- Tilt-up versions of guyed towers are available for easier installation and maintenance.
- Self erecting technology also used wisely

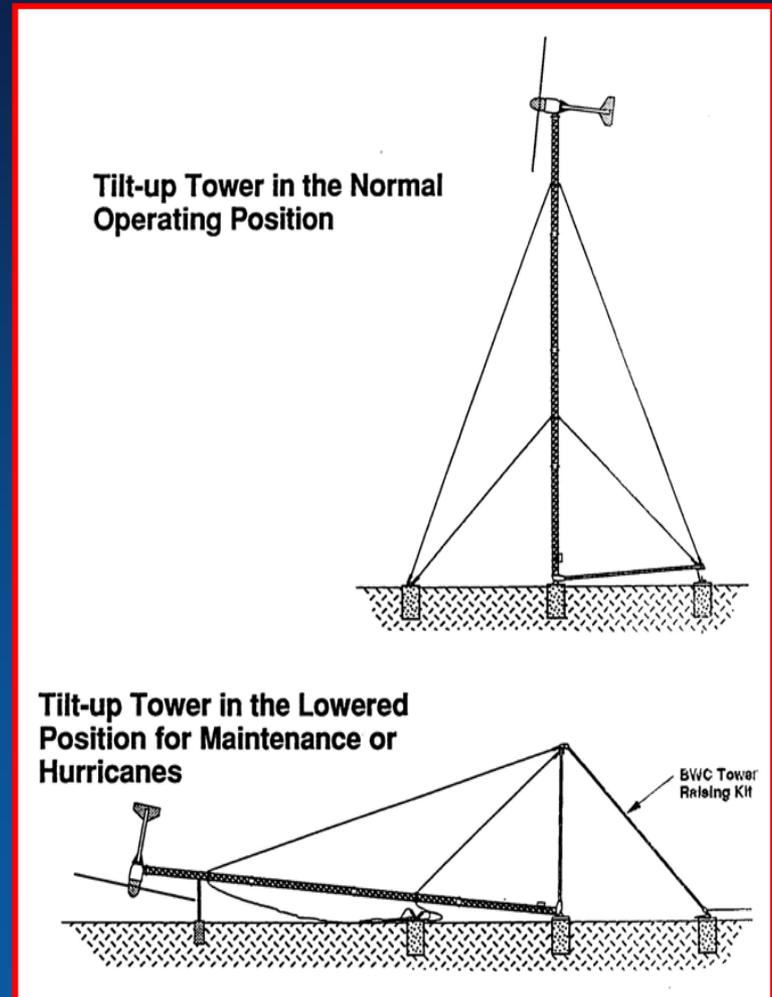

The Wind Turbine Controller

• Battery-Charging


- Converts AC power to DC for battery-charging
- Regulates the battery voltage to prevent over-charging
- When the battery is fully charged:
 - Power is diverted to another load, or ...
 - The rotor is unloaded and allowed to “freewheel”

• Grid Interconnection

- “Inverter,” converts the power to constant frequency 60 Hz AC

• Water Pumping

- Direct connection to the pump

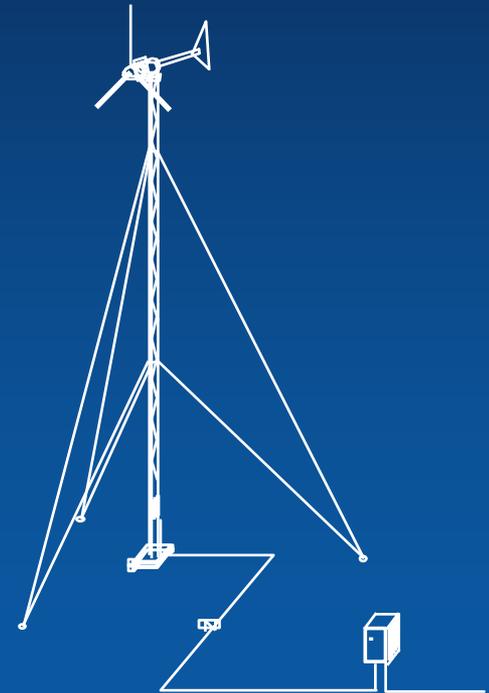

Small Wind Turbine Maintenance and Lifetime

- **“Low maintenance” not “no maintenance”**
 - Inspection and maintenance every year: tightening bolts and electrical connections, inspecting slip ring brushes, checking for corrosion, etc.
 - Between 2 and 4 years: blade leading edge tape may need replacement
 - Beyond 5-10 years: blade or bearing replacement may be needed
- **Lifetimes of 10 to 20 years are possible**
 - Some Jacobs wind turbines have been operating for more than 60 years with periodic maintenance!

“Hot Tips” on Small Wind Energy

- “Buy Reliability”

“Based on experience, I side with the ‘school of heavy metal,’ those who believe that beefiness of components is directly related to the longevity of the equipment.” M. Sagrillo, small wind turbine expert


- “Taller is Better”

Taller towers give better performance due to smoother wind and higher wind speeds

- “Micro-Siting”

For best performance, locate wind turbines above and away from obstructions to the wind

AC WTG

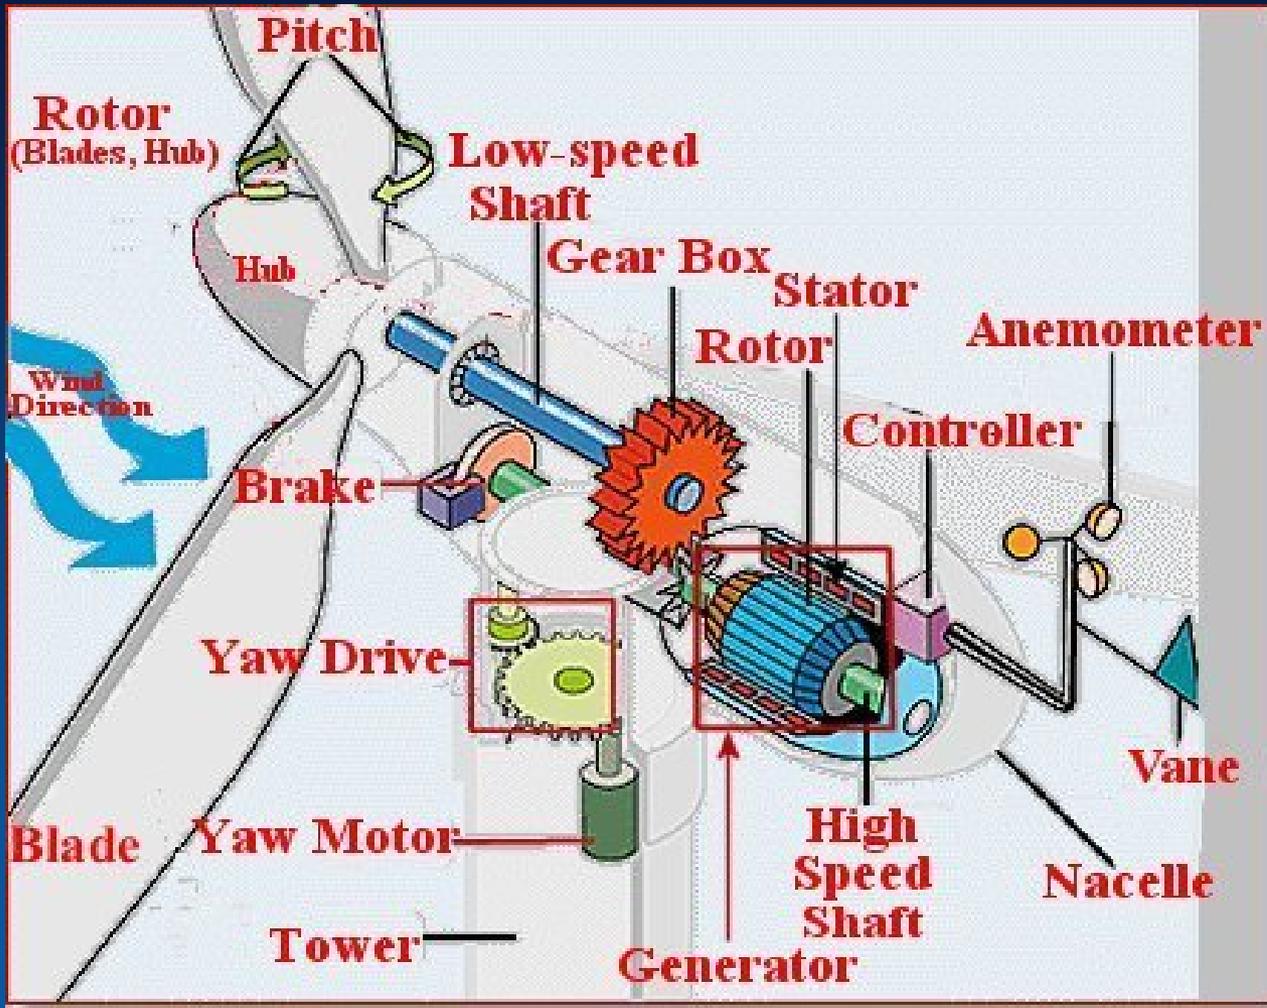

- Induction or variable speed generator
- Create AC power supplied to the grid
- Actively controlled

Control of Large WTG

Fixed Pitch (Stall regulated): The shape of the blade varies over its length so that as wind speed increase parts of the blade stop producing lift and limit power.

Variable Pitch: The rotation (pitch) of each blade is individually controlled to control lift

Yaw: Motors control yaw behavior based on a wind direction vain, used to shut down wind turbine in high winds but can also be a source of problems.

Brake: All wind turbines are required to have two of them but there are several types:

Aerodynamic: Flaps on the blades that cause drag.

Mechanical: Disks or calipers, like your car.

Electrical: using the generator to cause electrical resistance.

Characteristics of Large WTG

Power Types

- Induction (Constant speed)
- Variable Speed (uses power electronics)

Power System Efficiencies

- Aerodynamic
- Rotor
- Drive train / gear box
- Generator
- Power Conversion (if applicable)

1MW WTG Nacelle



A 27 m Blade



Rotor Area = 2460 m^2 for a 1MW wind turbine

- 1.5 MW turbine is now “standard”
- 5 MW Turbines in prototype

Other Large (and Small) Turbines Considerations

- Policy
- Siting
- Transmission
- External Conditions
- Intermittency

Policy

- Encourage economic development and use of local resources
- facilitate “green” markets
- Federal, state and local incentives
(Production Tax Credit (PTC) and Renewable Portfolio Standards (RPS))

Siting

- Avian and other wildlife
- Noise
- Visual Impact
- Land Ownership

Transmission

- Grid Access
- System studies
- Allocation of available capacity
- Scheduling and costs for usage
 - firm
 - non-firm

External Conditions

- Lightning
- Extreme Winds
- Corrosion
- Extreme temperatures

Intermittency

- Operational Impacts (ancillary services)
 - voltage/VAR control, load following, etc.
- 10-20% of system capacity is reasonable

Other General Wind Terms

- **Availability**: The amount of time that the wind turbine is available to produce power (Maintenance parameter)
- **Capacity Factor**: The annual energy production of a wind turbine divided by the theoretical production if it ran at full rated power all of the time (Resource parameter)
 - The stronger the resource the higher the Capacity Factor
 - Usually reported monthly or yearly
 - 25-40% is typical, up to 60% has been reported
 - Reason for the “only works 1/3 of the time” quote.

Basic WTG Calculations

Back of the envelope calculations for wind turbine sizing

1. Turbine size or energy production
2. Cost of energy
3. Turbine capital cost

Note: Designing a power system that includes wind turbines is not a simple issue and should not be taken lightly.

Determining Turbine Size

There is a direct tradeoff between the size of the generator and the amount of power that it will produce. If you know one, you can get the other.

$$AKWH = CF * AV * GS * 8760$$

AKWH Annual energy production, kWh/yr

CF Capacity Factor (20 to 50%)

AV Turbine Availability (~95 to 98%)

GS Generator Size (rated power), kW

8760# of hours in a year

Example – What Sized Turbine?

Your community/home/building/business uses 11,250 kWh / year and you want ~ 25% of that to come from wind.

$$AEP = CF * GS * AV * 8760$$

CF 30% = 0.30 (~ 6 mps annual average)

AV 97% = .97

AEP 11,250 kWh

8760 # of hours in a year

$$GS = 11250 / (0.30 * .97 * 8760)$$

$$GS = 4.5 \text{ kW}$$

Of course there are many other factors...

Quick calculation of Annual Energy Production using density

$$AKWH = CF * Ar * WM * 8.76$$

AKWH Annual energy production, kWh/yr

CF Capacity factor (efficiency factor)

Ar Rotor Area, m²

WM Wind Map Power, W/m²

8.76 1000 hours in a year
converts W to kW

Levelized Cost of Energy

$$\text{COE} = \frac{(\text{FCR} * \text{ICC}) + \text{LRC} + \text{AOM}}{\text{AEP}}$$

COE = LEVELIZED COST OF ENERGY, \$/kWh

LRC = LEVELIZED REPLACEMENT COST, \$/yr
(major repairs)

ICC = INITIAL CAPITAL COST, \$

FCR = FIXED CHARGE RATE, per year

AEP = ANNUAL ENERGY PRODUCTION, kWh

AOM = ANNUAL OPERATION & MAINTENANCE, \$/kWh

Turbine Capital Cost

Hardware Cost		\$670/kW
turbine	\$550/kW	
tower	\$120/kW	
Installation Cost		\$100/kW
foundation, erection, interconnection		
Shipping		\$70/kW
Other		\$100/kW
ROUND NUMBER		\$1000/kW

Costs however are impacted by the market. In 2005 the cost of installed wind turbines has increased to between \$1300 and \$1400 per kW due to high steel prices and demand caused by the Production Tax Incentive

COE Example

1 MW TURBINE

FCR = 10% = 0.10

ICC = \$1000/kW = \$1,000,000

LRC = \$5,500

AOM = \$0.01/kWh availability elevation

AEP = 2,600,000 98% 1000 m


COE = $\frac{(0.1 * 1,000,000) + 10,000}{2,700,000} + 0.01$

COE = \$0.051 / kWh

So, which is better...

1. A location where the wind that blows only 50% of the time at 10 m/s but is calm the rest of the time
2. A location where the wind that blows all of the time at 5 m/s

Bergey 1500 (manufacturer's data)

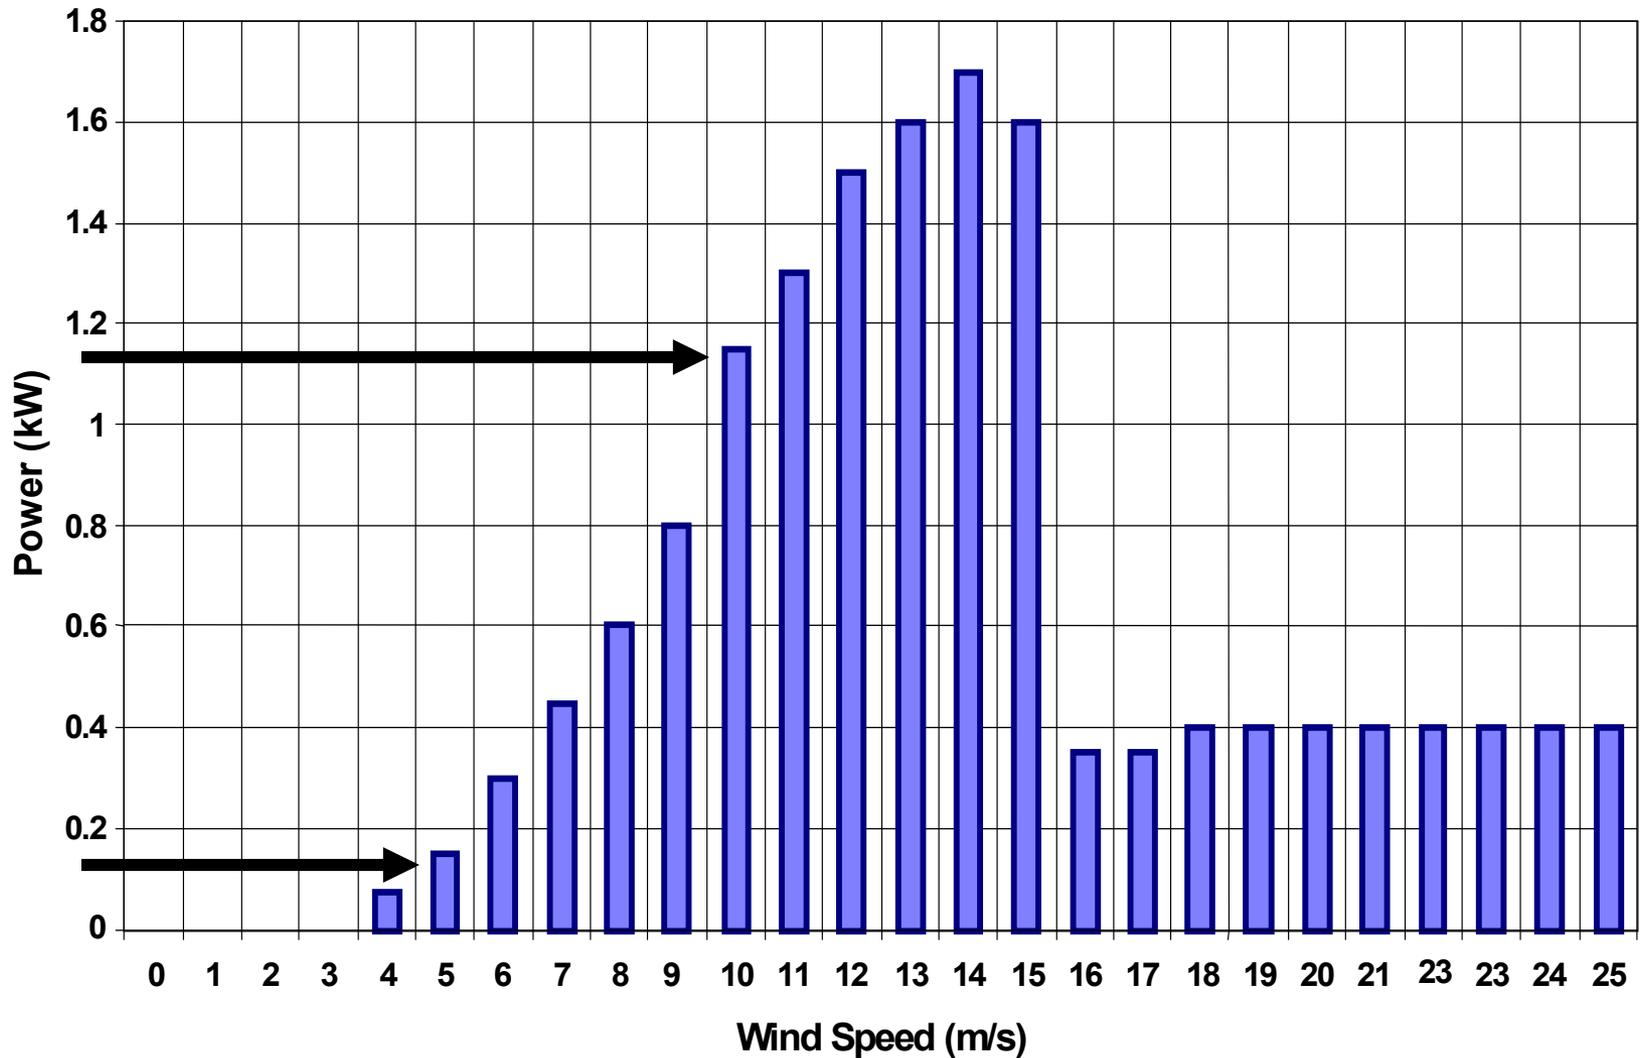

Make the calculation

AEP = expected power * availability * time

Case 1: 10 m/s 50% of the time

$$\begin{aligned} \text{AEP} &= 1.15 \text{ kW} * 0.97 * (8760 * 0.5) \\ &= 4,886 \text{ kWh / year} \end{aligned}$$

Case 2: 5 m/s all of the time

$$\begin{aligned} \text{AEP} &= 0.15 \text{ kW} * 0.97 * (8760 * 1.0) \\ &= 1,275 \text{ kWh / year} \end{aligned}$$

Further Information / References

Web Based:

- American Wind Energy Association <http://www.awea.org/>
- Wind Powering America
<http://www.eere.energy.gov/windpoweringamerica/>
- Danish Wind Industry Association guided tour and information.
<http://www.windpower.org/en/tour/>

Publications:

- Ackermann, T. (Ed's), *Wind Power in Power Systems*, John Wiley and Sons, west Sussex, England, p299-330 (2005).
- Hunter, R., Elliot, G. (Ed's), *Wind-Diesel Systems*. Cambridge, UK: Cambridge University Press, 1994.
- *Wind Energy Explained*, J. F. Manwell, J. G. McGowan, A. L. Rogers John Wiley & Sons Ltd. 2002.
- Paul Gipe, *Wind Energy Basics: A Guide to Small and Micro Wind Systems*, Real Goods Solar Living Book.
- AWS Scientific Inc. "Wind Resource Assessment Handbook" produced by for the National Renewable Energy Laboratory, Subcontract number TAT-5-15283-01, 1997

Thanks to:

- Ken Starcher, Alternative Energy Institute, West Texas A&M University